CATALOGUE HVAC 6.1.3
ENGLISH VERSION




















WE ARE YOUR BRAND

coolwell
Air Conditioning







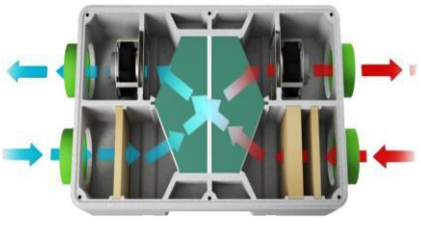

90% EFFICIENCY












# RESIDENCIAL & INDUSTRIAL AIR-CONDITIONING & VENTILATION

**CONTENT**


| | |
|---|---|
| AIR-CONDITIONING - HIGHWALL SPLIT BE-COOL HE | 3 |
| AIR-CONDITIONING - HIGHWALL SPLIT ICOOL | 3 |
| AIR-CONDITIONING - HIGHWALL SPLIT COOL-MAX | 4 |
| AIR-CONDITIONING - HIGHWALL SPLIT XCOOL | 4 |
| AIR-CONDITIONING - MULTI-MATCH M SERIES | 5 |
| AIR-CONDITIONING - MULTI-MATCH M COMBINATIONS | 6 |
| AIR-CONDITIONING - MULTI-MATCH M SERIES HIDROBOX M80 | 7 |
| AIR-CONDITIONING - MULTI-MATCH X SERIES | 8 |
| AIR-CONDITIONING - MULTI-MATCH X COMBINATIONS | 9 |
| AIR-CONDITIONING - PORTABLES APACT/APACS | 10 |
| AIR-CONDITIONING - DEHUMIDIFIERS DM-J | 10 |
| AIR-CONDITIONING - SPECIAL RECREATIONAL VEHICLE AC-CAMPER | 11 |
| AIR-CONDITIONING – DUCTED SPLIT CTBA SERIES | 12 |
| AIR-CONDITIONING - DUCTED SPLIT CTBS SERIES | 12 |
| AIR-CONDITIONING - DUCTED SPLIT CTBX SERIES | 13 |
| AIR-CONDITIONING - DUCTED HIGH PRESSURE SPLIT | 13 |
| AIR-CONDITIONING - CASSETTE SPLIT CASPS / CASG SERIES | 14 |
| AIR-CONDITIONING - CASSETTE SPLIT CASPX / CASGX SERIES | 15 |
| AIR-CONDITIONING - CONSOLE CCSX SERIES | 16 |
| AIR-CONDITIONING - FLOOR&CEILING FLCE SERIES | 16 |
| AIR-CONDITIONING - FLOOR STAND FLVE SERIES | 16 |
| AIR-CONDITIONING - COMBINATIONS TWINS | 17 |
| AIR-CONDITIONING - VRF | 18 |
| AIR-CONDITIONING - MONOBLOC AIR-WATER HEAT PUMP CHPX | 20 |
| AIR-CONDITIONING - MONOBLOC AIR-WATER HEAT PUMP CHPX HE | 21 |
| AIR-CONDITIONING - HIBRID AIR-WATER HEAT PUMP CWTP+CHPP | 22 |
| AIR-CONDITIONING - DHW TANK HEATER PUMP | 23 |
| AIR-CONDITIONING - SWIMINGPOOL HEAT PUMP | 23 |


**CONTENT**


| | |
|---|---|
| AIR-CONDITIONING - HEATING UNITS VOLCANO | 24 |
| AIR-CONDITIONING - INDUSTRIAL AIR COOLING | 24 |
| AIR-CONDITIONING - FANCOIL SERIES C | 25 |
| AIR-CONDITIONING - INDUSTRIAL FANCOILS FA/FP | 25 |
| AIR-CONDITIONING - CONFIGURABLE CHILLERS MEX VSX | 26 |
| AIR-CONDITIONING - CONFIGURABLE CHILLERS MEX HP EA | 26 |
| AIR-CONDITIONING - CHILLERS HP XEA DOMINO | 27 |
| AIR-CONDITIONING - ROOFTOP AIRTOP | 27 |
| VENTILATION - RESIDENTIAL HEAT RECOVERY UNITS RDCD | 28 |
| VENTILATION - INDUSTRIAL HEAT RECOVERY UNITS RAREC | 31 |
| VENTILATION - CURTAINS WING | 32 |
| VENTILATION - FIRE PROTECTION DUCT | 33 |
| GENERAL SALES CONDITIONS | 34 |
| WARRANTY CONDITIONS | 35 |

# Split BE-COOL HE - High Efficiency

## 2026 NEW RELEASE

SEER 8.5 A+++; SCOP >5.2 A+++
Cooling -15~53ºC; Heating -25~30ºC
7 speeds
Hotel Mode – Dry Contact
Gently breezing vanes







Wifi included



**A+++/A+++**
**R32**


**Very silent 19dB(A)**

| Indoor | Unit | BE-COOL HE 27UI | BE-COOL HE 35UI | BE-COOL HE 53UI | BE-COOL HE 70UI |
|---|---|---|---|---|---|
| **Outdoor** | **Unit** | **BE-COOL HE 27UE** | **BE-COOL HE 35UE** | **BE-COOL HE 53UE** | **BE-COOL 70UE** |
| Nominal Capacity | kW F/C | 2,6 / 3,3 | 3,5 / 3,9 | 5,2 / 5,5 | 7,0 / 7,1 |
| SEER / SCOP / SCOP' | | 8,5 / 4,6 / 5,2 | 8,5 / 4,7 / 5,9 | 8,5 / 4,6 / 5,6 | 8,5 / 4,7 / 5,6 |
| Energy Class SEER / SCOP / SCOP' | | A+++ / A++ / A+++ | A+++ / A++ / A+++ | A+++ / A++ / A+++ | A+++ / A++ / A+++ |
| Power Input | kW F/C | 0,7 / 0,9 | 1,1 / 1,0 | 1,4 / 1,4 | 1,9 / 1,8 |
| Sound Pressure Level | dB(A) (S/H/H-M/M/M-L/L/Silenc.) | 44/41/37/34/29/25/19 | 44/41/37/34/29/25/19 | 47/42/38/33/30/27/23 | 50/44/40/37/34/30/26 |
| Dimensions IDU | mm | 820×306×195 | 820×306×195 | 920×306×195 | 1100×333×222 |
| Dimensions ODU | mm | 787×498×290 | 810×549×305 | 927×699×380 | 978×803×421 |
| Refrigerant piping | Liquid - Gas | 1/4" - 3/8" | 1/4" - 3/8" | 1/4" - 1/2" | 1/4" - 1/2" |
| Additional charge* | g/m | 15 | 15 | 25 | 25 |
| Maximum total distance | m | 25 | 25 | 25 | 25 |
| Maximum difference in level | m | 10 | 10 | 10 | 10 |
| Price | IDU | 192 € | 210 € | 326 € | 393 € |
| | ODU | 392 € | 419 € | 865 € | 1.101 € |
| | **Set** | **584 €** | **629 €** | **1.191 €** | **1.494 €** |

*Precharge included maximal 5 meters

Power supply via the ODU (4-wire interconnection)

# Split ICOOL

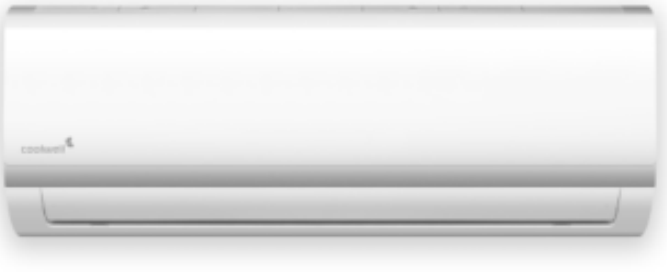









Wifi included

**A++/A+++**
**R32**

**21dB(A)**

| Indoor | Unit | ICOOL 27UI W | ICOOL 35UI W | ICOOL 53UI W | ICOOL 70UI W |
|---|---|---|---|---|---|
| **Outdoor** | **Unit** | **ICOOL 27UE W** | **ICOOL 35UE W** | **ICOOL 53UE W** | **ICOOL 70UE W** |
| Nominal Capacity | kW F/C | 2,6 / 2,9 | 3,5 / 3,8 | 5,3 / 5,5 | 7,0 / 7,3 |
| SEER / SCOP / SCOP' | | 6,3 / 4,0 / 5,1 | 6,1 / 4,0 / 5,1 | 7,4 / 4,0 / 5,1 | 6,1 / 4,0 / 5,0 |
| Energy Class SEER / SCOP / SCOP' | | A++ / A+ / A+++ | A++ / A+ / A+++ | A++ / A+ / A+++ | A++ / A+ / A++ |
| Power Input | kW F/C | 0,7 / 0,7 | 1,2 / 1,0 | 1,5 / 1,5 | 2,4 / 2,0 |
| Sound Pressure Level | dB(A) min/med/max/Sil. | 26 / 30 / 40 / 21 | 26 / 34 / 40 / 22 | 30 / 37 / 44 / 25 | 34 / 42 / 44 / 28 |
| Dimensions IDU | mm | 805x285x194 | 805x285x194 | 957x302x213 | 1040x327x220 |
| Dimensions ODU | mm | 720x495x270 | 720x495x270 | 805x554x330 | 890x673x342 |
| Refrigerant piping | Liquid - Gas | 1/4" - 3/8" | 1/4" - 3/8" | 1/4" - 1/2" | 3/8" - 5/8" |
| Additional charge* | g/m | 12 | 12 | 12 | 24 |
| Maximum total distance | m | 25 | 25 | 30 | 50 |
| Maximum difference in level | m | 10 | 10 | 20 | 25 |
| Price | IDU | 180 € | 196 € | 305 € | 368 € |
| | ODU | 366 € | 392 € | 809 € | 1.029 € |
| | **Set** | **546 €** | **588 €** | **1.114 €** | **1.397 €** |

*Precharge included maximal 5 meters

Power supply via the ODU (4-wire interconnection)



coolwell


# Split COOL-MAX

## 2026 NEW RELEASE
COOL-MAX D 8,8kW
MEGA-COOL 10,5kW





Wifi included



**A++/A+++**
**R32**

**22dB(A)**

Available in 4.4 kW, 8.8 kW & 10.5kW

| Indoor | Unit | COOL-MAX D 27UI | COOL-MAX 35UI | COOL-MAX 44UI | COOL-MAX D 53UI | COOL-MAX D 70UI | COOL-MAX D 88UI | MEGA-COOL 105UI |
|---|---|---|---|---|---|---|---|---|
| **Outdoor** | **Unit** | **COOL-MAX D 27UE** | **COOL-MAX 35UE** | **COOL-MAX 44UE** | **COOL-MAX D 53UE** | **COOL-MAX D 70UE** | **COOL-MAX D 88UE** | **MEGA-COOL 105UE** |
| Nominal Capacity | kW F/C | 2,6 / 2,6 | 3,5 / 3,5 | 4,4 / 4,4 | 5,1 / 5,2 | 7,0 / 7,2 | 8,8 / 8,9 | 10,0 / 11,2 |
| SEER / SCOP / SCOP' | | 6,1 / 4,0 / 5,1 | 6,1 / 4,0 / 5,1 | 6,1 / 4,0 / 5,1 | 6,1 / 4,0 / 5,1 | 6,5 / 4,0 / 5,1 | 6,1 / 4,0 / 5,6 | 6,3 / 4,0 / 5,1 |
| Energy Class SEER / SCOP / SCOP' | | A++ / A+ / A+++ | A++ / A+ / A+++ | A++ / A+ / A+++ | A++ / A+ / A+++ | A++ / A+ / A++ | A++ / A+ / A++ | A++/A+/A+++ |
| Power Input | kW F/C | 0,8 / 0,8 | 1,1 / 1,0 | 1,6 / 1,5 | 1,6 / 1,5 | 2,2 / 2,1 | 2,5 / 2,5 | 3,5 / 3,2 |
| Sound Pressure Level | dB(A) min/med/max/Sil. | 25/ 33/ 37/ 22 | 25/ 33/ 37/ 22 | 30/ 36/ 41/ 26 | 31/ 37/ 43/ 27 | 36/ 41/ 46/ 30 | 30/ 37/ 44/ 26 | 50/ 44/ 37/ 36 |
| Dimensions IDU | mm | 698x255x190 | 777x250x201 | 910x294x206 | 910x294x206 | 1010x315x220 | 1100x333x222 | 1220x360x252 |
| Dimensions ODU | mm | 712x459x276 | 712x459x276 | 795x549x305 | 853x602x349 | 920x699x380 | 978x803x421 | 982×804×421 |
| Refrigerant piping | Liquid - Gas | 1/4" - 3/8" | 1/4" - 3/8" | 1/4" - 3/8" | 1/4" - 3/8" | 1/4" - 1/2" | 1/4" - 1/2" | 1/4" - 5/8" |
| Additional charge* | g/m | 15 | 15 | 15 | 25 | 25 | 25 | 25 |
| Maximum total distance | m | 25 | 25 | 25 | 25 | 25 | 25 | 25 |
| Maximum difference in level | m | 10 | 10 | 10 | 10 | 10 | 10 | 10 |
| Price | IDU | 180 € | 196 € | 299 € | 305 € | 368 € | 699 € | 918 € |
| | ODU | 366 € | 392 € | 469 € | 809 € | 1.029 € | 998 € | 1.344 € |
| | **Set** | **546 €** | **588 €** | **768 €** | **1.114 €** | **1.397 €** | **1.697 €** | **2.262 €** |

*Precharge included maximal 5 meters

Power supply via the ODU (4-wire interconnection)

# Split XCOOL







Wifi included



**A++/A+++**
**R32**

**21dB(A)**

| Indoor | Unit | XCOOL 27UI H | XCOOL 35UI H | XCOOL 53UI S | XCOOL 70UI S |
|---|---|---|---|---|---|
| **Outdoor** | **Unit** | **XCOOL 27UE H** | **XCOOL 35UE H** | **XCOOL 53UE S** | **XCOOL 70UE S** |
| Nominal Capacity | kW F/C | 2,6 / 2,6 | 3,4 / 3,5 | 5,1 / 5,2 | 7,3 / 7,3 |
| SEER / SCOP / SCOP' | | 6,1 / 4,0 / 5,1 | 6,2 / 4,0 / 5,1 | 6,7 / 4,0 / 5,3 | 6,5 / 4,1 / 5,3 |
| Energy Class SEER / SCOP / SCOP' | | A++ / A+ / A+++ | A++ / A+ / A+++ | A++ / A+ / A+++ | A++ / A+ / A+++ |
| Power Input | kW F/C | 0,9 / 0,6 | 1,3 / 1,0 | 1,7 / 1,4 | 2,2 / 2,2 |
| Sound Pressure Level | dB(A) Turbo/max/med/min/Sil. | 38/34/31/30/21 | 42/38/35/33/23 | 44/39/36/34/24 | 48/44/40/38/27 |
| Dimensions IDU | mm | 690×283×199 | 750×285×200 | 900×310×225 | 1082×330×233 |
| Dimensions ODU | mm | 649×450×232 | 649×450×232 | 708×530×258 | 890×695×319 |
| Refrigerant piping | Liquid - Gas | 1/4" - 1/2" | 1/4" - 1/2" | 1/4" - 1/2" | 1/4" - 5/8" |
| Additional charge* | g/m | 20 | 20 | 20 | 30 |
| Maximum total distance | m | 20 | 20 | 20 | 25 |
| Maximum difference in level | m | 10 | 10 | 10 | 15 |
| Price | IDU | 180 € | 196 € | 305 € | 368 € |
| | ODU | 366 € | 392 € | 809 € | 1.029 € |
| | **Set** | **546 €** | **588 €** | **1.114 €** | **1.397 €** |

*Precharge included maximal 5 meters

Power supply via the ODU (4-wire interconnection)

# Multi-Match M Series



**A++/A+/A+++ R32**


## Outdoor Units Multi-Match M:

| Outdoor | Unit | Multi 2x1 2X1C41 | Multi 2x1 2X1C53 | Multi 3x1 3X1C61 | Multi 3x1 3X1C79 | Multi 4x1 4X1C82 | Multi 4x1 4X1C105 | Multi 5x1 5X1C125 |
|---|---|---|---|---|---|---|---|---|
| Capacity | kW F/C | 4,1 / 4,4 | 5,3 / 5,6 | 6,1 / 6,6 | 7,9 / 8,2 | 8,2 / 8,8 | 10,5 / 11,1 | 12,3 / 12,6 |
| SEER / SCOP / SCOP' | | 6,8 / 4,0 / 5,1 | 6,1 / 4,0 / 5,1 | 6,5 / 4,0 / 5,2 | 6,1 / 4,0 / 5,1 | 7,0 / 4,0 / 5,1 | 6,5 / 4,0 / 5,0 | 6,8 / 3,8 / 5,1 |
| Energy Class SEER / SCOP / SCOP' | | A+ / A+ / A+++ | A++ / A+ / A+++ | A++ / A+ / A+++ | A++ / A+ / A+++ | A++ / A+ / A+++ | A++ / A+ / A++ | A++ / A / A+++ |
| Power Input | kW F/C máx | 1,3 / 1,7 | 1,6 / 1,5 | 1,9 / 1,8 | 2,4 / 2,2 | 2,5 / 2,4 | 3,5 / 2,9 | 4,1 / 3,3 |
| Dimensions | mm | 800x554x333 | 800x554x333 | 845x702x363 | 845x702x363 | 946x810x410 | 946x810x410 | 946x810x410 |
| Refrigerant piping | Liquid - Gas | 2x(1/4" - 3/8") | 2x(1/4" - 3/8") | 3x(1/4" - 3/8") | 3x(1/4" - 3/8") | 3x(1/4" - 3/8") 1x(1/4" - 1/2") | 3x(1/4" - 3/8") 1x(1/4" - 1/2") | 4x(1/4" - 3/8") 1x(1/4" - 1/2") |
| Precharge | m | 15 | 15 | 15 | 15 | 30 | 30 | 37,5 |
| Additional charge | g/m | 12 | 12 | 12 | 12 | 12 | 12 | 12 |
| Maximum single distance | m | 25 | 25 | 30 | 30 | 35 | 35 | 35 |
| Maximum total distance | m | 40 | 40 | 60 | 60 | 80 | 80 | 80 |
| Maximum difference in level ODU up | m | 10 | 10 | 10 | 10 | 10 | 10 | 10 |
| Maximum difference in level IDU up | m | 15 | 15 | 15 | 15 | 15 | 15 | 15 |
| Maximum difference in level between IDU | m | 10 | 10 | 10 | 10 | 10 | 10 | 10 |
| Price | ODU | **932 €** | **1.202 €** | **1.428 €** | **1.670 €** | **2.090 €** | **2.642 €** | **2.849 €** |

Power supply via the ODU (4-wire interconnection)

## Indoor Units Multi-Match M:

| Indoor Units | Series | Capacity kW F/C | Dimensions IDU mm | Piping Liquid - Gas | Price |
|---|---|---|---|---|---|
| ICOOL 27IU | HIGHWALL | 2,6 / 2,9 | 805x285x194 | 1/4" - 3/8" | **180 €** |
| ICOOL 35IU | HIGHWALL | 3,5 / 3,8 | 805x285x194 | 1/4" - 3/8" | **196 €** |
| ICOOL 53IU | HIGHWALL | 5,3 / 5,5 | 957x302x213 | 1/4" - 1/2" | **305 €** |
| ICOOL 70IU | HIGHWALL | 7,0 / 7,3 | 1040x327x220 | 3/8" - 5/8" | **368 €** |
| CASPS 35 | CASSETTE 60X60 | 3,5 / 4,4 | 570x570x260 | 1/4" - 3/8" | **594 €** |
| CASPS 53 | CASSETTE 60X60 | 5,3 / 5,4 | 570x570x260 | 1/4" - 1/2" | **617 €** |
| CASG 70 | CASSETTE 90X90 | 7,03 / 7,62 | 830x830x205 | 3/8" - 5/8" | **818 €** |
| | | | | | Decorative panel included |
| CCSX 35 | CONSOLE | 3,5 / 3,8 | 700x600x210 | 1/4" - 3/8" | **500 €** |
| CCSX 53 | CONSOLE | 5,3 / 5,6 | 700x600x210 | 1/4" - 1/2" | **550 €** |
| CTBA 35 | DUCT | 3,5 / 3,8 | 700x635x210 | 1/4" - 3/8" | **515 €** |
| CTBA 53 | DUCT | 5,3 / 6,0 | 700x635x210 | 1/4" - 1/2" | **594 €** |
| CTBA 70 | DUCT | 7,0 / 7,6 | 1100x774x249 | 3/8" - 5/8" | **673 €** |
| | | | | | Pump to evacuate condensed water & Weekly timer wired control included |
| HIDROBOX- M80 | HIDROKIT | 8kW ACS | 918x490x325 | | **2.946 €** |
| | | | | | for 4X1C105 or 5x1C125 |

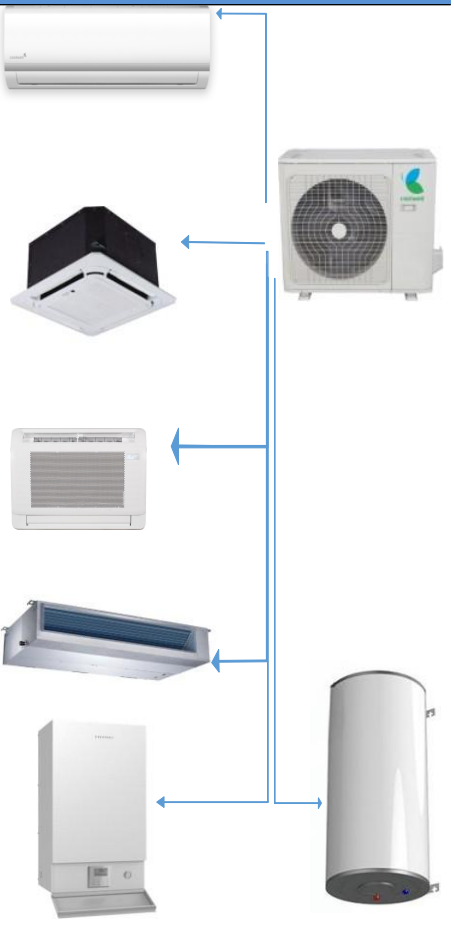



coolwell

# Multi-Match M Series: Combinations

## Common combinations


| Set | Price | Set | Price | Set | Price |
|---|---|---|---|---|---|
| ODU: 2X1C41<br>IDU: ICOOL 27 + ICOOL 27 | **1.292 €** | ODU: 2X1C53<br>IDU: ICOOL 27 + ICOOL 35 | **1.578 €** | ODU: 3X1C79<br>IDU: 2xICOOL 27 + ICOOL 35 | **2.226 €** |
| ODU: 2X1C41<br>IDU: ICOOL 27 + ICOOL 35 | **1.308 €** | ODU: 2X1C53<br>IDU: ICOOL 35 + ICOOL 35 | **1.594 €** | ODU: 4X1C82<br>IDU: 3xICOOL 27 + ICOOL 35 | **2.826 €** |
| ODU: 2X1C53<br>IDU: ICOOL 27 + ICOOL 27 | **1.562 €** | ODU: 3X1C61<br>IDU: 2xICOOL 27 + ICOOL 35 | **1.984 €** | ODU: 5X1C125<br>IDU: 4xICOOL 27 + ICOOL 35 | **3.765 €** |

| SET | COMBINATION | 2X1C41 | | 2X1C53 | | 3X1C61 | | 3X1C79 | | 4X1C82 | | 4X1C105 | | 5X1C125 | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | COOL kW | HEAT kW | COOL kW | HEAT kW | COOL kW | HEAT kW | COOL kW | HEAT kW | COOL kW | HEAT kW | COOL kW | HEAT kW | COOL kW | HEAT kW |
| ONE INTERIOR UNIT | 27 | 2,5 | 2,9 | 2,5 | 3 | 2,5 | 3 | 2,5 | 3 | 2,5 | 3 | 2,5 | 3 | 2,5 | 3 |
| | 35 | 3,5 | 3,8 | 3,5 | 3,8 | 3,5 | 3,8 | 3,5 | 3,8 | 3,5 | 3,8 | 3,5 | 3,8 | 3,5 | 3,8 |
| | 53 | 4,1 | 4,4 | 5 | 5,3 | 5 | 5,3 | 5 | 5,6 | 5 | 5,6 | 5 | 5,6 | 5 | 5,6 |
| | 70 | | | | | | | | | 7 | 7,3 | 7 | 7,3 | 7 | 7,6 |
| TWO INTERIOR UNITS | 27+27 | 4,1 | 4,4 | 5,2 | 5,5 | 5,3 | 5,9 | 5,3 | 6 | 5,3 | 6 | 5,3 | 6 | 5,3 | 6 |
| | 27+35 | 4,1 | 4,5 | 5,4 | 5,6 | 6 | 6,3 | 6 | 6,3 | 6 | 7 | 6 | 7 | 6 | 6,8 |
| | 27+53 | | | 5,4 | 5,6 | 6,3 | 6,3 | 6,8 | 7 | 7,3 | 7,9 | 7,5 | 8,8 | 7,5 | 8,8 |
| | 27+70 | | | | | | | | | 7,5 | 7,9 | 9,5 | 9,8 | 9,7 | 10,2 |
| | 35+35 | | | 5,4 | 5,6 | 6,2 | 6,3 | 6,3 | 6,5 | 6,5 | 7,5 | 7 | 7,5 | 7 | 7,5 |
| | 35+53 | | | | | | | 6,8 | 7 | 7,3 | 8 | 8,5 | 9,4 | 8,5 | 9,4 |
| | 35+70 | | | | | | | | | | | 10 | 10 | 10 | 10,5 |
| | 53+53 | | | | | | | | | 7,5 | 8 | 10 | 10,1 | 10,5 | 11 |
| | 53+70 | | | | | | | | | | | | | 11,5 | 11,5 |
| THREE INTERIOR UNITS | 27+27+27 | | | | | 6,3 | 6,7 | 7,9 | 8,2 | 7,1 | 8,6 | 7,5 | 10 | 8 | 10 |
| | 27+27+35 | | | | | 6,3 | 6,7 | 7,9 | 8,3 | 7,8 | 8,6 | 8,5 | 10,1 | 9 | 11 |
| | 27+27+53 | | | | | | | | | 7,8 | 8,6 | 10 | 10,7 | 10,5 | 11,5 |
| | 27+27+70 | | | | | | | | | | | 10 | 10,7 | 11,5 | 12 |
| | 27+35+35 | | | | | | | 7,9 | 8,3 | 7,8 | 8,6 | 9,5 | 10,7 | 9 | 11,5 |
| | 27+35+53 | | | | | | | | | 7,8 | 8,6 | 10 | 10,7 | 11 | 12 |
| | 27+35+70 | | | | | | | | | | | 10 | 10,7 | 11,5 | 12 |
| | 27+53+53 | | | | | | | | | | | 10 | 10,7 | 12 | 12 |
| | 35+35+35 | | | | | | | 7,9 | 8,3 | 7,8 | 8,6 | 10 | 10,7 | 9,5 | 11,5 |
| | 35+35+53 | | | | | | | | | | | 10 | 10,7 | 11,5 | 12 |
| | 35+35+70 | | | | | | | | | | | 10 | 10,7 | 12 | 12 |
| | 35+53+53 | | | | | | | | | | | 10 | 10,7 | 12 | 12 |
| | 35+53+70 | | | | | | | | | | | | | 12 | 12 |
| | 53+53+53 | | | | | | | | | | | | | 12 | 12 |
| FOUR INTERIOR UNITS | 27+27+27+27 | | | | | | | | | 8,2 | 8,9 | 10,6 | 11,1 | 10,5 | 12,3 |
| | 27+27+27+35 | | | | | | | | | 8,2 | 9,1 | 10,6 | 11,1 | 11,5 | 12,3 |
| | 27+27+27+53 | | | | | | | | | | | 10,6 | 11,1 | 12 | 12,3 |
| | 27+27+27+70 | | | | | | | | | | | | | 12,3 | 12,3 |
| | 27+27+35+35 | | | | | | | | | | | 10,6 | 11,1 | 11,4 | 12,3 |
| | 27+27+35+53 | | | | | | | | | | | 10,6 | 11,1 | 12 | 12,3 |
| | 27+27+35+70 | | | | | | | | | | | | | 11,7 | 12,3 |
| | 27+27+53+53 | | | | | | | | | | | | | 12,3 | 12,3 |
| | 27+35+35+35 | | | | | | | | | | | 10,6 | 11,1 | 11,4 | 12,3 |
| | 27+35+35+53 | | | | | | | | | | | 10,6 | 11,1 | 12,3 | 12,3 |
| | 27+35+35+70 | | | | | | | | | | | | | 11,9 | 12,3 |
| | 27+35+53+53 | | | | | | | | | | | | | 11,6 | 12,3 |
| | 35+35+35+35 | | | | | | | | | | | 10,6 | 11,1 | 11,5 | 12,3 |
| | 35+35+35+53 | | | | | | | | | | | | | 10,7 | 12,3 |
| FIVE INTERIOR UNITS | 27+27+27+27+27 | | | | | | | | | | | | | 12,3 | 12,3 |
| | 27+27+27+27+35 | | | | | | | | | | | | | 12,3 | 12,3 |
| | 27+27+27+27+53 | | | | | | | | | | | | | 12,3 | 12,3 |
| | 27+27+27+35+35 | | | | | | | | | | | | | 12,7 | 12,3 |
| | 27+27+27+35+53 | | | | | | | | | | | | | 10,2 | 12,3 |
| | 27+27+35+35+35 | | | | | | | | | | | | | 10,7 | 12,3 |
| | 27+35+35+35+35 | | | | | | | | | | | | | 11,4 | 12,3 |

# Multi-Match M Series: HIDROBOX M80

## Hydronic unit 8kW heating capacity

Controls domestic hot water (DHW), underfloor heating, fan coils, and low-temperature radiators. WiFi control included

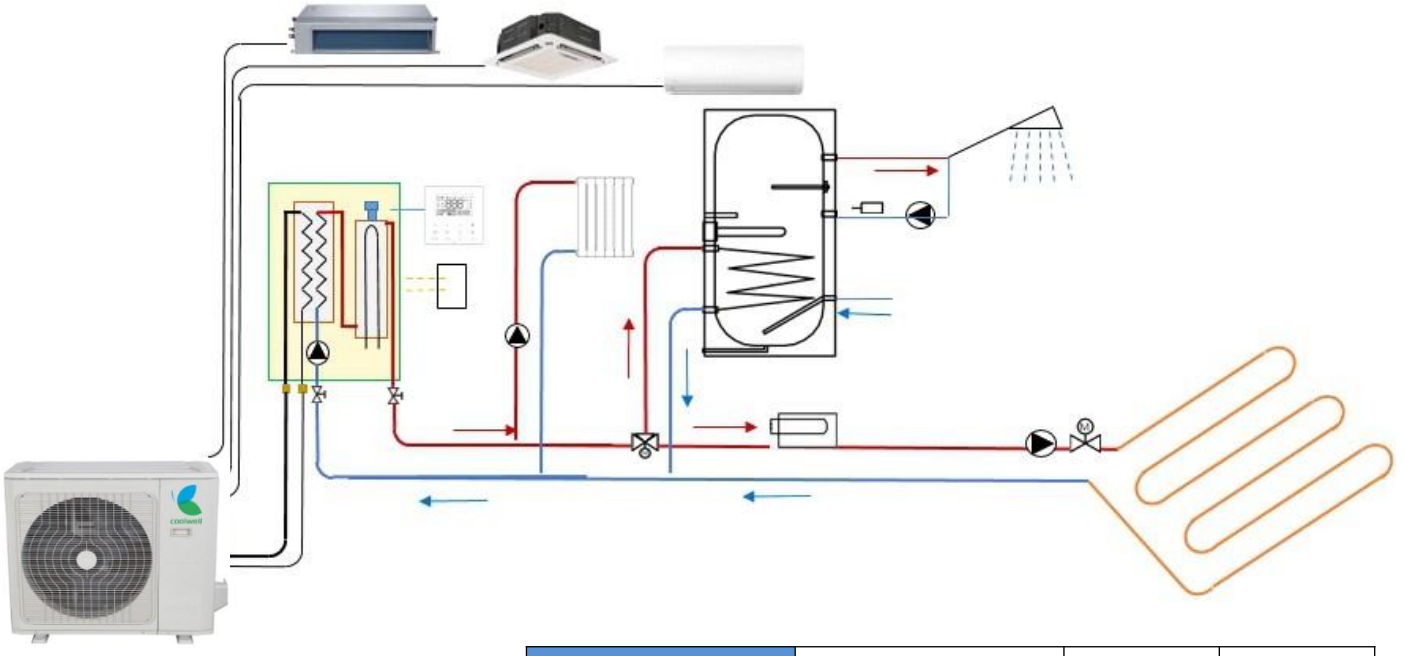



Wifi included

amazon alexa


| | | | |
|---|---|---|---|
| **Air a 7°C & Water a 35°C** | Capacity | kW | 8,0 |
| | Consumption | kW | 1,8 |
| | COP | | 4,4 |
| | SCOP | | 4,3 |
| | Energy Class | | A++ |
| | Efficiency | % | 167,0 |
| **Air a 7°C & Water a 45°C** | Capacity | kW | 8,0 |
| | Consumption | kW | 2,5 |
| | COP | | 3,2 |
| **Air a 7°C & Water a 55°C** | Capacity | kW | 8,0 |
| | Consumption | kW | 3,3 |
| | COP | | 2,4 |
| | SCOP | | 2,9 |
| | Energy Class | | A+ |
| | Efficiency | % | 114,0 |
| **Air a 2° C & Water a 35° C** | Capacity | kW | 8,0 |
| | Consumption | kW | 2,6 |
| | COP | | 3,1 |
| **Air a 2° C & Water a 55° C** | Capacity | kW | 8,0 |
| | Consumption | kW | 3,8 |
| | COP | | 2,1 |
| **Meassures** | Dimensions | mm | 918x490x325 |
| | Net Weight | kg | 56 |
| | Packaging | mm | 1055x570x415 |
| | Net Weight w/Packaging | kg | 64 |
| | Electrical Resistance | W | 3000 |
| | Sound Pressure Level (máx) | dB(A) | 32 |
| **Price** | | | **2.946 €** |



coolwell

# Multi-Match X Series

2026 NEW RELEASE



**A++/A+/A+++**
**R32**


## Outdoor Unit Multi-Match X:

| Outdoor | Unit | Multi 2x1 2X1C41X | Multi 2x1 2X1C53X | Multi 3x1 3X1C61X | Multi 3x1 3X1C79X | Multi 4x1 4X1C105X | Multi 5x1 5X1C125X |
|---|---|---|---|---|---|---|---|
| Capacity | kW F/C | 4,1 / 4,5 | 5,1 / 5,2 | 6,2 / 6,5 | 7,9 / 8,0 | 10,6 / 10,9 | 12,3 / 13,1 |
| SEER / SCOP / SCOP' | | 6,1 / 4,0 / 4,6 | 6,1 / 4,0 / 4,6 | 6,1 / 4,0 / 4,6 | 6,1 / 4,0 / 4,6 | 6,6 / 4,2 / 5,1 | 6,8 / 4,3 / 5,3 |
| Energy Class SEER / SCOP / SCOP' | | A++ / A+ / A++ | A++ / A+ / A++ | A++ / A+ / A++ | A++ / A+ / A++ | A++ / A+ / A+++ | A++ / A+ / A+++ |
| Power Input | kW F/C max | 1,7 / 1,7 | 2,1 / 2,1 | 2,6 / 2,6 | 2,9 / 2,9 | 4,8 / 4,5 | 4,9 / 4,5 |
| Dimensions | mm | 853×602×349 | 853×602×349 | 920×699×380 | 920×699×380 | 1083x858x494 | 1083x858x494 |
| Refrigerant piping | Liquid - Gas | 2x(1/4" - 3/8") | 2x(1/4" - 3/8") | 3x(1/4" - 3/8") | 3x(1/4" - 3/8") | 4x(1/4" - 3/8") | 5x(1/4" - 3/8") |
| Precharge | m | 10 | 10 | 15 | 15 | 20 | 25 |
| Additional charge | g/m | 15 | 15 | 15 | 15 | 15 | 15 |
| Maximum single distance | m | 25 | 25 | 25 | 25 | 25 | 25 |
| Maximum total distance | m | 40 | 40 | 60 | 60 | 80 | 90 |
| Maximum difference in level ODU up | m | 10 | 10 | 10 | 10 | 10 | 10 |
| Maximum difference in level IDU up | m | 15 | 15 | 15 | 15 | 15 | 15 |
| Maximum difference in level between IDUs | m | 10 | 10 | 10 | 10 | 10 | 10 |
| Price | | **932 €** | **1.202 €** | **1.428 €** | **1.670 €** | **2.642 €** | **2.849 €** |

Power supply via the ODU (4-wire interconnection)

## Indoor Units Multi-Match X:

| Unit Indoor | Series | Capacity kW F/C | Dimensions IDU mm | Piping Liquid - Gas | Price |
|---|---|---|---|---|---|
| COOLMAX D 27 IU | HIGHWALL | 2,6 / 2,6 | 698x255x190 | 1/4" - 3/8" | **180 €** |
| COOLMAX 35 IU | HIGHWALL | 3,5 / 3,5 | 777x250x201 | 1/4" - 3/8" | **196 €** |
| COOLMAX 44 IU | HIGHWALL | 4,4 / 4,4 | 910x294x206 | 1/4" - 3/8" | **299 €** |
| COOLMAX D 53 IU | HIGHWALL | 5,1 / 5,2 | 910x294x206 | 1/4" - 3/8" | **305 €** |
| COOLMAX D 70 IU | HIGHWALL | 7,0 / 7,2 | 1010x315x220 | 1/4" - 1/2" | **368 €** |
| BE-COOL HE 27 IU | HIGHWALL | 2,6 / 3,3 | 820×306×195 | 1/4" - 3/8" | **192 €** |
| BE-COOL HE 35 IU | HIGHWALL | 3,5 / 3,9 | 820×306×195 | 1/4" - 3/8" | **210 €** |
| BE-COOL HE 53 IU | HIGHWALL | 5,2 / 5,5 | 920×306×195 | 1/4" - 1/2" | **326 €** |
| BE-COOL HE 70 IU | HIGHWALL | 7,0 / 7,1 | 1100×333×222 | 1/4" - 1/2" | **393 €** |
| CASPX 35 IU | CASSETTE 60X60 | 3,5 / 3,6 | 570x570x260 | 1/4" - 3/8" | **594 €** |
| CASPX 53 IU | CASSETTE 60X60 | 4,7 / 4,7 | 570x570x260 | 1/4" - 3/8" | **617 €** |
| CASGX 71 IU | CASSETTE 90X90 | 7,0 / 8,0 | 838×838×254 | 3/8" - 5/8" | **818 €** |
| | | | | Decorative panel included | |
| CCSX 35 IU | CONSOLE | 3,5 / 3,6 | 700×600×215 | 1/4" - 3/8" | **500 €** |
| CCSX 53 IU | CONSOLE | 4,7 / 4,7 | 700×600×215 | 1/4" - 3/8" | **550 €** |
| CTBX 35 IU | DUCTED | 3,5 / 3,6 | 700×452×200 | 1/4" - 3/8" | **515 €** |
| CTBX 53 IU | DUCTED | 4,7 / 4,7 | 920×452×200 | 1/4" - 3/8" | **594 €** |
| CTBX 71 IU | DUCTED | 7,0 / 8,0 | 920×700×245 | 3/8" - 5/8" | **673 €** |

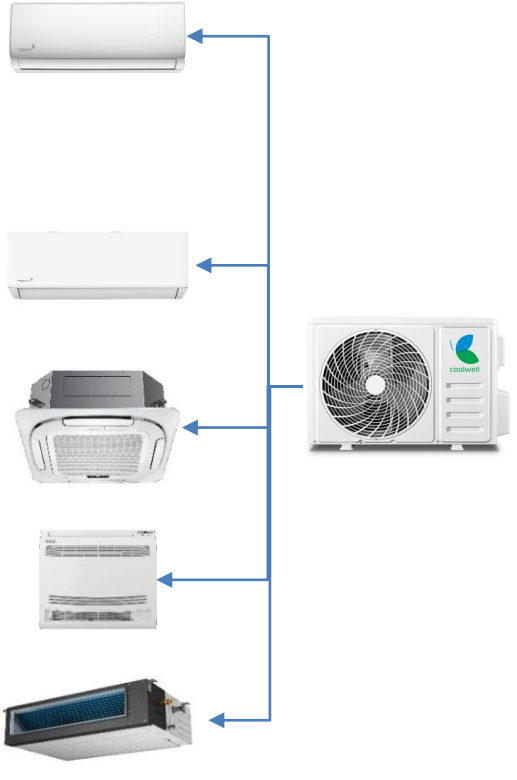

Pump to evacuate condensed water & Weekly timer wired control included

# Multi-Match X Series

2026 NEW RELEASE

## Common combinations

| Set | Price | Set | Price | Set | Price | Set | Price | Set |
|---|---|---|---|---|---|---|---|---|
| UE: 2X1C41X<br>UI: COOLMAX 27 + COOLMAX 27 | 1.292 € | UE: 2X1C53X<br>UI: COOLMAX 27 + COOLMAX 35 | 1.578 € | UE: 3X1C79X<br>UI: 2xCOOLMAX 27 + COOLMAX 35 | 2.226 € | | | |
| UE: 2X1C41X<br>UI: COOLMAX 27 + COOLMAX 35 | 1.308 € | UE: 2X1C53X<br>UI: COOLMAX 35 + COOLMAX 35 | 1.594 € | UE: 4X1C82X<br>UI: 3xCOOLMAX 27 + COOLMAX 35 | 2.826 € | | | |
| UE: 2X1C53X<br>UI: COOLMAX 27 + COOLMAX 27 | 1.562 € | UE: 3X1C61X<br>UI: 2xCOOLMAX 27 + COOLMAX 35 | 1.984 € | UE: 5X1C125X<br>UI: 4xCOOLMAX 27 + COOLMAX 35 | 3.765 € | | | |

| SET | COMBINATION | 2X1C41X | | 2X1C53X | | 3X1C61X | | 3X1C79X | | 4X1C105X | | 5X1C125X | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | COOL kW | HEAT kW | COOL kW | HEAT kW | COOL kW | HEAT kW | COOL kW | HEAT kW | COOL kW | HEAT kW | COOL kW | HEAT kW |
| ONE INTERIOR UNIT | 27 | 2,6 | 2,8 | 2,6 | 2,6 | 2,6 | 2,6 | 2,6 | 2,6 | 2,6 | 2,6 | 2,6 | 2,6 |
| | 35 | 3,5 | 3,7 | 3,5 | 3,7 | 3,5 | 3,7 | 3,5 | 3,7 | 3,5 | 3,5 | 3,5 | 3,5 |
| | 53 | | | 5,1 | 5,2 | 5,1 | 5,2 | 5,1 | 5,2 | 5,3 | 5,3 | 5,3 | 5,3 |
| | 70 | | | | | | | 7,0 | 7,0 | 7,0 | 7,0 | 7,0 | 7,0 |
| TWO INTERIOR UNITS | 27+27 | 4,3 | 4,6 | 5,1 | 5,2 | 5,0 | 5,7 | 5,6 | 7,0 | 5,3 | 5,3 | 5,3 | 5,3 |
| | 27+35 | 4,6 | 4,6 | 5,3 | 5,3 | 6,0 | 6,2 | 6,4 | 7,6 | 6,2 | 6,2 | 6,2 | 6,2 |
| | 27+53 | | | 5,3 | 5,4 | 6,3 | 6,6 | 7,6 | 7,9 | 7,9 | 7,9 | 7,9 | 7,9 |
| | 27+70 | | | | | | | | | 9,7 | 9,7 | 9,7 | 9,7 |
| | 35+35 | | | 5,4 | 5,7 | 6,2 | 6,6 | 7,0 | 8,0 | 7,0 | 7,0 | 7,0 | 7,0 |
| | 35+53 | | | | | 6,6 | 6,6 | 7,6 | 6,5 | 8,8 | 8,8 | 8,8 | 8,8 |
| | 35+70 | | | | | | | | | 10,6 | 10,6 | 10,6 | 10,6 |
| | 53+53 | | | | | | | 7,9 | 6,7 | 10,6 | 10,6 | 10,6 | 10,6 |
| | 53+70 | | | | | | | | | 12,3 | 10,6 | 12,3 | 12,3 |
| | 70+70 | | | | | | | | | | | 12,3 | 12,3 |
| THREE INTERIOR UNITS | 27+27+27 | | | | | 6,5 | 7,1 | 7,9 | 8,2 | 7,9 | 7,9 | 7,9 | 7,9 |
| | 27+27+35 | | | | | 6,7 | 7,1 | 8,0 | 8,2 | 8,8 | 8,8 | 8,8 | 8,8 |
| | 27+27+53 | | | | | 6,7 | 7,1 | 8,0 | 8,3 | 10,6 | 10,6 | 10,6 | 10,6 |
| | 27+27+70 | | | | | | | | | 12,3 | 10,6 | 12,3 | 12,3 |
| | 27+35+35 | | | | | | | 8,0 | 8,3 | 9,7 | 9,7 | 9,7 | 9,7 |
| | 27+35+53 | | | | | | | 8,0 | 8,3 | 11,4 | 10,6 | 11,4 | 11,4 |
| | 27+35+70 | | | | | | | | | 13,2 | 10,6 | 12,3 | 13,1 |
| | 27+53+53 | | | | | | | | | | | | |
| | 27+53+70 | | | | | | | | | | | | |
| | 35+35+35 | | | | | | | 8,0 | 8,3 | 10,6 | 10,6 | 10,6 | 10,6 |
| | 35+35+53 | | | | | | | | | 12,3 | 12,3 | 12,3 | 13,1 |
| | 35+35+70 | | | | | | | | | | | 12,3 | 13,1 |
| | 35+53+53 | | | | | | | | | | | 12,3 | 13,1 |
| | 35+53+70 | | | | | | | | | | | 12,3 | 13,1 |
| FOUR INTERIOR UNITS | 27+27+27+27 | | | | | | | | | 10,6 | 10,6 | 10,6 | 10,6 |
| | 27+27+27+35 | | | | | | | | | 10,8 | 10,6 | 11,4 | 11,4 |
| | 27+27+27+53 | | | | | | | | | 11,6 | 10,6 | 12,3 | 13,1 |
| | 27+27+27+70 | | | | | | | | | | | 12,3 | 13,1 |
| | 27+27+35+35 | | | | | | | | | 12,3 | 10,6 | 12,3 | 13,1 |
| | 27+27+35+53 | | | | | | | | | | | 12,3 | 13,1 |
| | 27+27+35+70 | | | | | | | | | | | 12,3 | 13,1 |
| | 27+35+35+35 | | | | | | | | | 10,6 | 13,2 | 12,3 | 13,1 |
| | 27+35+35+53 | | | | | | | | | | | 12,3 | 13,1 |
| | 35+35+35+35 | | | | | | | | | | | 12,3 | 13,1 |
| | 35+35+35+53 | | | | | | | | | | | 12,3 | 13,1 |
| FIVE INTERIOR UNITS | 27+27+27+27+27 | | | | | | | | | | | 12,3 | 13,1 |
| | 27+27+27+27+35 | | | | | | | | | | | 12,3 | 13,1 |
| | 27+27+27+27+53 | | | | | | | | | | | 12,3 | 13,1 |
| | 27+27+27+35+35 | | | | | | | | | | | 12,3 | 13,1 |
| | 27+27+35+35+35 | | | | | | | | | | | 12,3 | 13,1 |



coolwell

# Portables APACT/APACS



Window KIT

IR Control

| Model | | APACT 09 CO | APACS 12 CO |
|---|---|---|---|
| Capacity | kW Frío | 2,6 | 3,5 |
| EER | | 2,6 | 2,6 |
| Energy Class SEER | | A | A |
| Power Input | kW | 1,0 | 1,3 |
| Dehumidification | litros/h | 0,54 | 1,3 |
| Area | m2 | 20 | 30 |
| Dimensions | mm | 330x292x686 | 330x292x686 |
| Weight | kg | 19 | 20,5 |
| Speeds | | 2 | 3 |
| Price | | **444 €** | **522 €** |

# Dehumidifiers DM-J

| Model | | DM-J 10 | DM-J 20 | DM-J 30 | DM-J 50 |
|---|---|---|---|---|---|
| Dehumidification | liter/day | 10 | 20 | 30 | 50 |
| Consumption | kW | 0,25 | 0,36 | 0,46 | 0,72 |
| Airflow | m3/h | 105 | 160 | 180 | 270 |
| Max Sound Level | dB(A) | 46 | 42 | 53 | 53 |
| Area | m2 | 15 | 20 | 25 ~ 30 | 35 ~ 50 |
| Operational range | ºC | 5 ~ 35 | 5 ~ 35 | 5 ~ 35 | 5 ~ 35 |
| Speeds | | 2 | 2 | 3 | 3 |
| Timer | | x | x | x | x |
| Auto defrost | | x | x | x | x |
| Full deposit alarm | | x | x | x | x |
| Dimensions | mm | 288x198x509 | 320x230x500 | 352x272x499 | 393x297x623 |
| Dimensions w/Packaging | mm | 223x314x532 | 360x268x535 | 392x310x535 | 418x326x663 |
| Water tank | liter | 2,5 | 2,6 | 4 | 8 |
| Net Weight/Gross | kg | 9,8/11,0 | 12,0/14,0 | 14,5 / 16,0 | 18,0 / 19,5 |
| Price | | **134 €** | **204 €** | **249 €** | **328 €** |



# SPECIAL RV AC-CAMPER

2026
NEW RELEASE



## R32 Inverter

| Model | | AC-CAMPER |
|---|---|---|
| Power Supply | | 220-240V / 50Hz |
| Capacity Nominal. | kW F/C | 3,1 / 3,1 |
| Consumption | kW F/C | 1,5 / 1,1 |
| Power Input | A F/C | 8,5 / 6,4 |
| Setting temperature | ºC | 18 ~ 30 |
| Operational range | ºC | -5 ~ 43 |
| Dimensions IDU | mm | 540x72x490 |
| Dimensions ODU | mm | 1054x253x736 |
| Weight | kg | 42 |
| **Price** | | **1.679 €** |

R32 Inverter Air Conditioner for Caravans

- Dual-fan structure
- Higher energy efficiency
- Optimized sound level
- Ultra-compact and lightweight design
- PP waterproof housing resistant to UV radiation
- Easy installation

IR remote control and WiFi connectivity

Compatible with 362×362 mm and 400×400 mm roof opening sizes






coolwell

# Ducted split CTBA Wifi incl.

- Compact indoor units
- Single-fan outdoor units
- Vertical installation possible

(*not with CTBA 35 W)

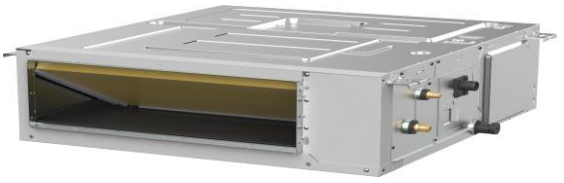



Weekly timer wired control included

AIRZONE

KOOLNOVA

IFTTT

amazon alexa

**A++/A+++**

**R32**

Three-phase ODU

| Unit Indoor | | CTBA 35 W | CTBA 53 W | CTBA 70 W | CTBA 88 W | CTBA 105 W | CTBA 120 W | CTBA 140 W | CTBA 105 W | CTBA 140 W | CTBA 160 W |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Unit Outdoor | | COUR N 35K | COURN 53K | COUA 70K | COUA 88K | COUR N 105K | COUR N 120K | COUA 140K | COUR N 105T | COUA 140T | COUA 160T |
| Capacity | kW F/C | 3,5 / 3,8 | 5,3 / 6,0 | 7,0 / 7,6 | 8,8 / 9,4 | 10,6 / 11,7 | 12,0 / 13,5 | 14,1 / 16,1 | 10,6 / 11,7 | 14,1 / 16,1 | 15,2 / 17,6 |
| SEER / SCOP / SCOP' | | 6,3 / 4,1 / 5,1 | 6,5 / 4,1 / 5,1 | 6,5 / 4,2 / 5,4 | 6,3 / 4,1 / 5,1 | 6,2 / 4,1 / 5,1 | 6,1 / 4,0 / 5,1 | 6,1 / 4,0 / 5,1 | 6,1 / 4,1 / 5,1 | 6,1 / 4,0 / 5,1 | 6,1 / 4,0 / 5,1 |
| Class SEER/SCOP/SCOP' | | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ |
| Power Input | kW F/C | 1,1 / 1,0 | 1,6 / 1,6 | 2,3 / 2,0 | 2,8 / 2,4 | 3,9 / 3,2 | 4,2 / 3,4 | 4,5 / 4,6 | 4,0 / 3,2 | 4,5 / 4,6 | 5,2 / 5,1 |
| Sound Pressure Level | dB(A) (Min-Med-Max) | 31/ 33/ 35 | 31/ 34/ 36.5 | 31/ 32.5/ 33.5 | 35/ 37/ 39 | 33/ 36/ 38 | 36/ 37.5/ 39 | 39.5/ 41.5/ 43.5 | 34/ 37/ 40 | 39.5/ 41.5/ 43.5 | 41.5/ 43/ 44.5 |
| Static Pressure | Pa | 0 ~ 100 | 0 ~ 160 | 0 ~ 160 | 0 ~ 160 | 0 ~ 160 | 0 ~ 160 | 0 ~ 160 | 0 ~ 160 | 0 ~ 160 | 0 ~ 160 |
| Airflow | m³/h (Min-Med-Max) | 470/570/660 | 650/780/ 900 | 700/1000/1200 | 900/1200/1500 | 1100/1400/1700 | 1300/1700/2000 | 1300/1700/2000 | 1100/1400/1700 | 1300/1700/2000 | 1500/1900/2200 |
| Dimensions IDU | mm | 700x506x200 | 700x750x245 | 1000x750x245 | 1000x750x245 | 1200x750x245 | 1200x750x245 | 1200x750x245 | 1200x750x245 | 1200x750x245 | 1200x750x300 |
| Dimensions ODU | mm | 765x303x555 | 805x330x554 | 890x342x673 | 946x410x810 | 946x410x810 | 946x410x810 | 980x375x975 | 946x410x810 | 980x375x975 | 980x375x975 |
| Refrigerant piping | Liquid - Gas | 1/4" - 3/8" | 1/4" - 1/2" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" |
| Additional charge* | g/m | 12 | 12 | 24 | 24 | 24 | 24 | 24 | 24 | 24 | 24 |
| Maximum total distance | m | 25 | 30 | 50 | 50 | 65 | 65 | 75 | 75 | 75 | 75 |
| Maximum difference in level | m | 10 | 20 | 25 | 25 | 30 | 30 | 30 | 30 | 30 | 30 |
| Price | Indoor | 515 € | 594 € | 673 € | 918 € | 955 € | 987 € | 946 € | 955 € | 978 € | 1.056 € |
| | Outdoor | 771 € | 872 € | 1.121 € | 1.344 € | 1.780 € | 2.070 € | 2.694 € | 1.865 € | 2.784 € | 2.865 € |
| | **Set** | **1.286 €** | **1.466 €** | **1.794 €** | **2.262 €** | **2.735 €** | **3.057 €** | **3.640 €** | **2.820 €** | **3.762 €** | **3.921 €** |

*Precharge included maximal 5 meters

Power supply via the ODU (4-wire interconnection)
Pump to evacuate condensed water & Weekly timer wired control included

# Ducted split CTBS Wifi





AIRZONE

KOOLNOVA

**A++/A+++**

**R32**


| Indoor Unit | | CTB2S 52 | CTB2S 71 | CTB S 90 | CTB S 105 | CTB S 140 |
|---|---|---|---|---|---|---|
| Outdoor Unit | | COU2S 52K | COU2S 71K | COU S 90K | COU S 105K | COU S 140K |
| Capacity | kW F/C | 5,0 / 5,5 | 7,0 / 8,0 | 8,8 / 9,0 | 10,5 / 11,5 | 14,4 / 17,3 |
| SEER / SCOP / SCOP' | | 7,0 / 4,3 / 5,4 | 6,3 / 4,1 / 5,4 | 6,2 / 4,0 / 5,1 | 6,1 / 4,0 / 5,1 | 6,1 / 4,3 / 5,4 |
| Class SEER/SCOP/SCOP' | | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ |
| Power Input | kW F/C | 1,4 / 1,5 | 2,2 / 2,2 | 2,7 / 2,4 | 3,7 / 3,4 | 4,8 / 4,7 |
| Sound Pressure Level | dB(A) (Min-Med-Max) | 33 / 37 / 41 | 30 / 34 / 38 | 35 / 39 / 42 | 38 / 40 / 42 | 42 / 45 / 48 |
| Static Pressure | Pa | 0 ~ 50 | 0 ~ 150 | 0 ~ 160 | 0 ~ 160 | 0 ~ 160 |
| Airflow de aire | m³/h (Min-Med-Max) | 650 / 770 / 900 | 960 / 1130 / 1300 | 900 / 1120 / 1450 | 1400 / 1600 / 1800 | 1900 / 2200 / 2400 |
| Dimensions IDU | mm | 1180x190x447 | 1100x245x700 | 1140x268x720 | 1140x268x720 | 1300x350x800 |
| Dimensions ODU | mm | 810x580x280 | 860x670x310 | 860x670x310 | 950x840x340 | 950x1386x340 |
| Refrigerant piping | Liquid - Gas | 1/4" - 1/2" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" |
| Additional charge* | g/m | 12 | 28 | 28 | 28 | 28 |
| Maximum total distance | m | 30 | 50 | 50 | 50 | 50 |
| Maximum difference in level | m | 15 | 30 | 30 | 30 | 30 |
| Price | Indoor | 594 € | 673 € | 918 € | 955 € | 946 € |
| | Outdoor | 872 € | 1.121 € | 1.344 € | 1.780 € | 2.694 € |
| | **Set** | **1.466 €** | **1.794 €** | **2.262 €** | **2.735 €** | **3.640 €** |

*Precharge included maximal 5 meters

Power supply via the ODU (4-wire interconnection)
Pump to evacuate condensed water & Weekly timer wired control included

# Ducted CTBX Wifi incl.

2026 NEW RELEASE

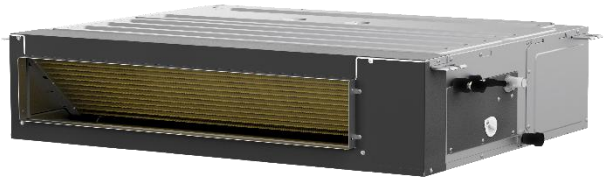



Weekly timer wired control included

AIRZONE

amazon alexa

**A++/A+++**

**R32**

Three-phase ODU

| Indoor Unit | | CTBX 35 | CTBX 53 | CTBX 71 | CTBX 90 | CTBX 105 | CTBX 120 | CTBX 140 | CTBX 140 | CTBX 160 |
|---|---|---|---|---|---|---|---|---|---|---|
| Outdoor Unit | | COUX 35K | COUX53K | COUX 71K | COUX 90K | COUX 105K | COUX 120K | COUX 140K | COUX 140T | COUX 160T |
| Capacity | kW F/C | 3,5 / 3,6 | 5,3 / 5,4 | 7,0 / 8,0 | 8,8 / 9,4 | 10,6 / 11,7 | 12,1 / 13,5 | 14,1 / 16,1 | 14,1 / 16,1 | 16,0 / 18,2 |
| SEER / SCOP / SCOP' | | 6,5 / 4,0 / 5,1 | 6,1 / 4,0 / 5,1 | 6,8 / 4,1 / 5,1 | 6,1 / 4,0 / 5,1 | 6,4 / 4,1 / 5,1 | 6,1 / 4,0 / 5,1 | 6,1 / 4,0 / 5,1 | 6,1 / 4,0 / 5,1 | 6,1 / 4,0 / 5,1 |
| $\eta_s$C / $\eta_s$H / $\eta_s$H | | - | - | - | - | - | - | 241 / 157 / 201 | 241 / 157 / 201 | 241 / 157 / 201 |
| Class SEER/SCOP/SCOP' | | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ |
| Power Input | kW F/C | 1,1 / 0,9 | 1,7 / 1,6 | 2,1 / 2,1 | 2,8 / 2,8 | 3,4 / 3,2 | 4,4 / 3,9 | 4,9 / 4,9 | 4,9 / 4,9 | 6,4 / 5,5 |
| Sound Pressure Level | dB(A) (S/H/H-M/M/M-L/L/Silenc.) | 43/41/37/30/27 | 46/43/38/32/28 | 42/40/38/35/35 | 46/45/43/40/38 | 46/44/42/40/39 | 47/46/43/41/40 | 47/46/43/41/40 | 47/46/43/41/40 | 52/48/45/42/41 |
| Static Pressure | Pa | 0-100 | 0-100 | 0-160 | 0-160 | 0-200 | 0-200 | 0-200 | 0-200 | 0-200 |
| Dimensions IDU | mm | 700×452×200 | 920×452×200 | 920×700×245 | 920×700×245 | 1200x700x245 | 1200x700x245 | 1200x700x245 | 1200x700x245 | 1400x700x245 |
| Dimensions ODU | mm | 722×499×234 | 794×603×288 | 843×699×326 | 843×699×326 | 904×803×353 | 904×803×353 | 1004×857×403 | 1004×857×403 | 1004×857×403 |
| Refrigerant piping | Liquid - Gas | 1/4" - 3/8" | 1/4" - 3/8" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" |
| Additional charge* | g/m | 15 | 15 | 25 | 24 | 32 | 32 | 32 | 32 | 40 |
| Maximum total distance | m | 25 | 25 | 30 | 35 | 75 | 75 | 75 | 75 | 75 |
| Maximum difference in level | m | 10 | 10 | 15 | 20 | 30 | 30 | 30 | 30 | 30 |
| Price | Indoor | 515 € | 594 € | 673 € | 918 € | 955 € | 987 € | 946 € | 978 € | 1.056 € |
| | Outdoor | 771 € | 872 € | 1.121 € | 1.344 € | 1.780 € | 2.070 € | 2.694 € | 2.784 € | 2.865 € |
| | **Set** | **1.286 €** | **1.466 €** | **1.794 €** | **2.262 €** | **2.735 €** | **3.057 €** | **3.640 €** | **3.762 €** | **3.921 €** |

*Precharge included maximal 5 meters

Power supply via the ODU (4-wire interconnection)
Pump to evacuate condensed water & Weekly timer wired control included

# High pressure ducted split VRF









**Inverter**

**R410A**

| Indoor Unit | | CVR-D250TH/HR1-F310 | CVR-D280TH/HR1-F310 | CVR-V450TH/HZR1 | CVR-V560TH/HZR1 |
|---|---|---|---|---|---|
| Outdoor Unit | | CVR-D224W/HZR1-080 | CVR-D280W/HZR1-100 | CVR-E450W/ZR1 | CVR-V560W/ZR1-DM01 |
| Capacity | kW F/C | 23,14 / 26 | 28,0 / 31,5 | 45,0 / 50,0 | 56,0 / 63,0 |
| SEER / SCOP | | 6,2 / 4,1 | 6,1 / 4,0 | 6,1 / 4,0 | 6,1 / 4,0 |
| Power Input | kW F/C | 6,9 / 6,29 | 8,31 / 8,31 | 12,6 / 11,9 | 15,8 / 15,4 |
| Airflow | m3/h | 3.750 | 4.100 | 6.000 | 8.000 |
| Static Pressure | Pa | 0 ~ 150 | 0 ~ 150 | 0 ~ 200 | 0 ~ 200 |
| Sound Pressure Level int. | dB(A) | 45 ~ 53 | 45 ~ 55 | 61 | 64 |
| Dimensions IDU | mm | 1440x448x811 | 1465x448x811 | 2165x676x916 | 2165x676x916 |
| Dimensions ODU | mm | 1015x1430x450 | 1120x1549x528 | 1340x1740x840 | 1340x1740x840 |
| Weight IDU | kg | 102 | 102 | 222 | 222 |
| Weight ODU | kg | 113 | 154 | 275 | 290 |
| Power Supply IDU | | 3x2,5mm2 | 3x2,5mm2 | 5x2,5mm2 | 5x2,5mm2 |
| Power Supply ODU | | 5x6mm2 | 5x6mm2 | 5x10mm2 | 5x10mm2 |
| Refrigerant piping* | Liquid - Gas | On demand | On demand | On demand | On demand |
| Additional charge* | g/m | **7.695 €** | **8.761 €** | **16.583 €** | **18.438 €** |

*: Precharge to 0 meters. it is necessary to add gas and calculate the refrigerant pipes based on the length of the installation.

The 45kW and 56kW IDUs operate at a single speed (pulley adjustment may be necessary)

Further information is available in the technical documentation or from our technical department at dto.tecnico@coolwell.es

# Cassette split CASPS/CASG Wifi incl.

## Cassette CASPS 60x60 A++/A+++
## R32

| Indoor Unit | | CASPS 35 | CASPS 53 |
|---|---|---|---|
| Outdoor Unit | | COURN 35 | COURN 53 |
| Capacity | kW F/C | 3,5 / 3,8 | 5,3 / 5,6 |
| SEER / SCOP / SCOP' | | 6,8 / 4,1 / 5,1 | 6,5 / 4,1 / 5,1 |
| Energy Class SEER / SCOP / SCOP' | | A++ / A+ / A+++ | A++ / A+ / A++ |
| Power Input | kW F/C | 1,0 / 1,0 | 1,6 / 1,5 |
| Sound Pressure Level | dB(A) mín/med/máx/Silenc. | 25,5/ 33/ 36/ 41 | 29/ 35,5/ 39,5/ 43 |
| Dimensions IDU | mm | 570-570-245 | 570-570-245 |
| Dimensions ODU | mm | 765-303-555 | 805-330-554 |
| Dimensions Panel | mm | 647-647-50 | 647-647-50 |
| Refrigerant piping | Liquid - Gas | 1/4" - 3/8" | 1 / 4" - 1 / 2" |
| Additional charge* | g/m | 12 | 12 |
| Maximum total distance | m | 25 | 30 |
| Maximum difference in level | m | 10 | 20 |
| Price | Indoor | 594 € | 617 € |
| | Outdoor | 771 € | 872 € |
| | **Set** | **1.365 €** | **1.489 €** |

*Precharge included maximal 5 meters
Power supply via the ODU (4-wire interconnection)

















## Cassette CASG N 90x90 A++/A+++
## R32

| Indoor Unit | | CASG N 70 | CASG N 88 | CASG N 105 | CASG N 120 | CASG N 140 | CASG N 105 | CASG N 140 | CASG N 160 |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | Three-phase ODU | | |
| Outdoor Unit | | COUA 70K | COUA 88K | COUR N 105K | COUR N 120K | COUA 140K | COUR N 105T | COUA 140T | COUR N 160T |
| Capacity | kW F/C | 7,0 / 7,6 | 8,8 / 9,4 | 10,5 / 11,2 | 12,0 / 13,5 | 14,1 / 16,1 | 10,5 / 11,1 | 14,1 / 16,1 | 15,3 / 18,2 |
| SEER / SCOP / SCOP' | | 6,3 / 4,1 / 5,4 | 6,6 / 4,2 / 5,1 | 6,7 / 4,0 / 5,1 | 6,1 / 4,0 / 5,1 | 6,1 / 4,0 / 5,1 | 6,3 / 4,0 / 5,1 | 6,1 / 4,0 / 5,1 | 6,1 / 4,0 / 4,9 |
| Energy Class SEER / SCOP / SCOP' | | A++/A+/A+++ | A++/A/A+++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ | A+/A+/A++ | A+/A+/A+++ |
| Power Input | kW F/C | 2,3 / 1,9 | 2,8 / 2,5 | 3,7 / 2,9 | 4,2 / 3,7 | 4,9 / 4,5 | 3,9 / 3,0 | 5,0 / 4,6 | 5,7 / 5,7 |
| Sound Pressure Level | dB(A) mín/med/máx/Silenc. | 27/39,5/42,5/45,5 | 38,5/44/47/49,5 | 39/44,5/47,5/50 | 38/46/48,5/51 | 3,9 / 3,2 | 39/44,5/47,5/50 | 37,5/46,5/48,5/51 | 40/48/50,5/53 |
| Dimensions IDU | mm | 830-830-205 | 830-830-245 | 830-830-245 | 830-830-287 | 830-830-287 | 830-830-245 | 830-830-287 | 830-830-287 |
| Dimensions ODU | mm | 890-342-673 | 946-410-810 | 946-410-810 | 946-410-810 | 980-375-975 | 946-410-810 | 980-375-975 | 980-375-975 |
| Dimensions Panel | mm | 950-950-55 | 950-950-55 | 950-950-55 | 950-950-55 | 950-950-55 | 950-950-55 | 950-950-55 | 950-950-55 |
| Refrigerant piping | Liquid - Gas | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" |
| Additional charge* | g/m | 24 | 24 | 24 | 24 | 24 | 24 | 24 | 24 |
| Maximum total distance | m | 50 | 50 | 65 | 65 | 65 | 65 | 65 | 65 |
| Maximum difference in level | m | 25 | 25 | 30 | 30 | 30 | 30 | 30 | 30 |
| Price | Indoor | 818 € | 975 € | 975 € | 1.014 € | 1.061 € | 975 € | 1.061 € | 1.131 € |
| | Outdoor | 1.121 € | 1.344 € | 1.780 € | 2.070 € | 2.694 € | 1.865 € | 2.784 € | 2.865 € |
| | **Set** | **1.939 €** | **2.319 €** | **2.755 €** | **3.084 €** | **3.755 €** | **2.840 €** | **3.798 €** | **3.996 €** |

*Precharge included maximal 5 meters
Power supply via the ODU (4-wire interconnection)

Power supply via the ODU (4-wire interconnection)


# Cassette CASPX/CASGX Wifi incl.

## Cassette CASPX 60x60
## A++/A+++
## R32





Wifi incluido




| Indoor Unit | | CASPX 35 | CASPX 53 |
|---|---|---|---|
| Outdoor Unit | | COUX 35 | COUX 53 |
| Capacity | kW F/C | 3,5 / 3,6 | 4,7 / 4,7 |
| SEER / SCOP / SCOP' | | 6,5 / 4,0 / 5,1 | 6,1 / 4,0 / 5,1 |
| Energy Class SEER / SCOP / SCOP' | | A++ / A+ / A+++ | A++ / A+ / A++ |
| Power Input | kW F/C | 1,1 / 0,9 | 1,5 / 1,4 |
| Sound Pressure Level | dB(A) (S/H/M/L/Silenc.) | 52/50/46/40/37 | 56/53/48/42/38 |
| Dimensions IDU | mm | 570x570x260 | 570x570x260 |
| Dimensions ODU | mm | 722×499×234 | 794×603×288 |
| Dimensions Panel | mm | 650×57×650 | 650×57×650 |
| Refrigerant piping | Liquid - Gas | 1/4" - 3/8" | 1/4" - 3/8" |
| Additional charge* | g/m | 15 | 15 |
| Maximum total distance | m | 25 | 25 |
| Maximum difference in level | m | 10 | 10 |
| Price | Indoor | 594 € | 617 € |
| | Outdoor | 771 € | 872 € |
| | **Set** | **1.365 €** | **1.489 €** |

*Precharge included maximal 5 meters
Power supply via the ODU (4-wire interconnection)





Wifi incluido

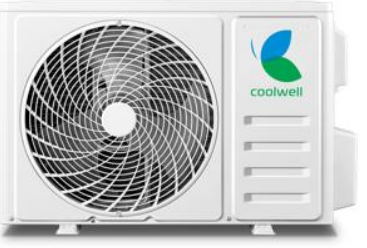

## Cassette CASGX 90x90
## A++/A+++
## R32

Three-phase ODU →

| Indoor Unit | | CASGX 71 | CASGX 90 | CASGX 105 | CASGX 120 | CASGX 140 | CASGX 140 | CASGX 160 |
|---|---|---|---|---|---|---|---|---|
| Outdoor Unit | | COUX 71K | COUX 90K | COUX 105K | COUX 120K | COUX 140K | COUX 140T | COUX 160T |
| Capacity | kW F/C | 7,0 / 8,0 | 8,8 / 9,4 | 10,5 / 11,7 | 12,1 / 13,5 | 14,1 / 16,1 | 14,1 / 16,1 | 16,0 / 18,2 |
| SEER / SCOP / SCOP' | | 6,9 / 4,1 / 5,1 | 6,2 / 4,0 / 5,1 | 6,2 / 4,1 / 5,1 | 6,1 / 4,0 / 5,1 | 6,1 / 4,0 / 5,1 | 6,1 / 4,0 / 5,1 | 6,1 / 4,0 / 5,1 |
| $\eta_s$S,C / $\eta_s$S,H / $\eta_s$S,H | | | | | | 241 / 157 / 201 | 241 / 157 / 201 | 241 / 157 / 201 |
| Class SEER/SCOP/SCOP' | | A++/A+/A+++ | A++/A/A+++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ |
| Power Input | kW F/C | 2,1 / 2,1 | 2,8 / 2,8 | 3,3 / 3,3 | 4,2 / 3,7 | 4,5 / 4,8 | 4,5 / 4,8 | 5,6 / 5,6 |
| Sound Pressure Level | dB(A) (S/H/M/L/Silenc.) | 60/58/54/50/47 | 61/57/53/50/45 | 63/60/59/57/53 | 64/61/60/58/54 | 64/61/60/58/54 | 64/61/60/58/54 | 64/61/60/58/54 |
| Dimensions IDU | mm | 838×838×254 | 838×838×254 | 838×838×299 | 838×838×299 | 838×838×299 | 838×838×299 | 838×838×299 |
| Dimensions ODU | mm | 843×699×326 | 843×699×326 | 904×803×353 | 904×803×353 | 1004×857×403 | 1004×857×403 | 1004×857×403 |
| Dimensions Panel | mm | 950x950x45 | 950x950x45 | 950x950x45 | 950x950x45 | 950x950x45 | 950x950x45 | 950x950x45 |
| Refrigerant piping | Liquid - Gas | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" |
| Additional charge* | g/m | 25 | 24 | 32 | 32 | 32 | 32 | 40 |
| Maximum total distance | m | 30 | 35 | 75 | 75 | 75 | 75 | 75 |
| Maximum difference in level | m | 15 | 20 | 30 | 30 | 30 | 30 | 30 |
| Price | Indoor | 818 € | 975 € | 975 € | 1.014 € | 1.061 € | 1.014 € | 1.131 € |
| | Outdoor | 1.121 € | 1.344 € | 1.780 € | 2.070 € | 2.694 € | 2.784 € | 2.865 € |
| | **Set** | **1.939 €** | **2.319 €** | **2.755 €** | **3.084 €** | **3.755 €** | **3.798 €** | **3.996 €** |

*Precharge included maximal 5 meters

Power supply via the ODU (4-wire interconnection)

# Console, Floor-ceiling, Floor stand



## Console CCSX
## A++/A+++ R32





## Floor-ceiling FLCE
## A++/A+++ R32





## Floor Stand FLVE
## A++/A+++ R32



Three-phase ODU

| Indoor Unit | | CCSX 35 | CCSX 53 | FLCE N 53 | FLCE N 70 | FLCE N 105 | FLCE N 140 | FLCE N 105 | FLCE N 140 | FLCE N 160 | FLVE 140 |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Outdoor Unit | | COUR N 35K | COURN 53K | COUR N 53K | COUA 70K | COUR 105K | COUA 140K | COUR N 105T | COUA 140T | COUA 160T | COUR 140T |
| Capacity | kW F/C | 3,5 / 3,8 | 5,3 / 5,6 | 5,3 / 5,6 | 7,0 / 7,6 | 10,5 / 11,7 | 14,1 / 16,1 | 10,5 / 11,7 | 14,1 / 16,1 | 15,2 / 18,2 | 14,0 / 16,0 |
| SEER / SCOP / SCOP' | | 7,3 / 4,0 / 5,1 | 6,5 / 4,0 / 4,9 | 6,2 / 4,0 / 5,1 | 6,3 / 4,1 / 5,4 | 6,2 / 4,1 / 5,1 | 6,1 / 4,0 / 5,1 | 6,2 / 4,1 / 5,1 | 6,1 / 4,0 / 5,1 | 6,1 / 4,0 / 5,1 | 6,1 / 4,0 / 5,1 |
| Class SEER/SCOP/SCOP' | | A++/A+/A+++ | A++/A+/A++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ | A++/A+/A+++ |
| Power Input | kW F/C | 1,0 / 1,1 | 1,6 / 1,5 | 1,4 / 1,5 | 2,3 / 2,0 | 4,0 / 3,3 | 5,0 / 4,8 | 3,9 / 3,3 | 5,0 / 4,8 | 5,9 / 6,0 | 4,9 / 5,2 |
| Sound Pressure Level | dB(A) mín/med/máx/Sil enc. | 23/27/34/37 | 26/32/38/41 | 24/36.5/41/43 | 32/43/46/49 | 37/44/48.5/50 | 36/45/50/53 | 39/44.5/47.5/51 | 36/45/50/53 | 38/46.5/50.5 /54 | 51.5/53/55/51 |
| Dimensions IDU | mm | 700-600-210 | 700-600-210 | 1068-675-235 | 1068-675-235 | 1650-675-235 | 1650-675-235 | 1650-675-235 | 1650-675-235 | 1650-675-235 | 629-456-1935 |
| Dimensions ODU | mm | 765-303-555 | 805-330-554 | 805-330-554 | 890-342-673 | 946-410-810 | 980-375-975 | 946-410-810 | 980-375-975 | 980-375-975 | 952-410-1333 |
| Refrigerant piping | Liquid - Gas | 1/4" - 3/8" | 1/4" - 1/2" | 1/4" - 1/2" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" | 3/8" - 5/8" |
| Additional charge* | g/m | 12 | 12 | 12 | 24 | 24 | 24 | 24 | 24 | 24 | 24 |
| Maximum total distance | m | 25 | 30 | 30 | 50 | 50 | 65 | 65 | 65 | 65 | 65 |
| Maximum difference in level | m | 10 | 20 | 20 | 25 | 25 | 30 | 30 | 30 | 30 | 30 |
| Price | Indoor | 500 € | 550 € | 678 € | 737 € | 997 € | 997 € | 997 € | 1.019 € | 1.016 € | 1.600 € |
| | Outdoor | 771 € | 872 € | 872 € | 1.121 € | 1.780 € | 2.694 € | 1.865 € | 2.784 € | 2.865 € | 2.784 € |
| | **Set** | **1.271 €** | **1.422 €** | **1.550 €** | **1.858 €** | **2.777 €** | **3.691 €** | **2.862 €** | **3.803 €** | **3.881 €** | **4.384 €** |

*Precharge included maximal 5 meters


Power supply via the ODU (4-wire interconnection)

COOLWELL WIFI kit LCAC **99€**

Wired control KJR12C **99€**

# Twins

**2026 NEW RELEASE**
SINGLE-FAN ODU

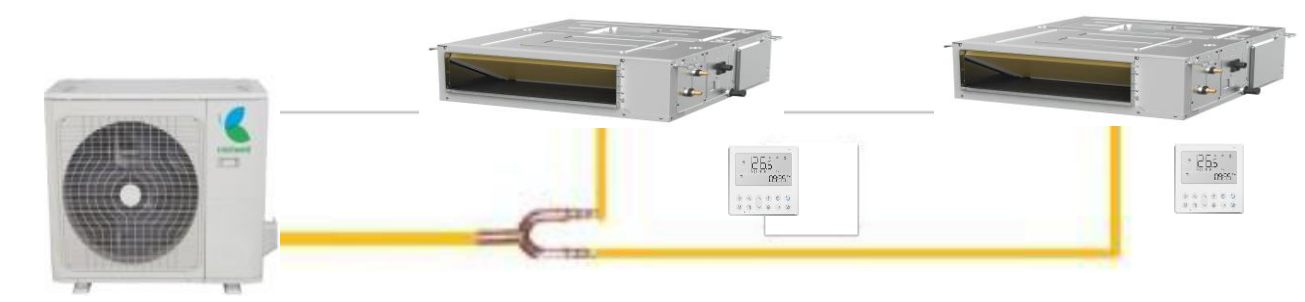

## Ducted Twin Combinations

| Indoor Units | Outdoor Units | Capacity IDU / ODU | Dimentions IDU | Dimentions ODU | Power Supply IDUs | Power Supply ODU | Price |
|---|---|---|---|---|---|---|---|
| | | kW | mm | mm | | | |
| CTBA 35 W<br>CTBA 35 W | COUR N 70K | 3,5 / 10,5 | 700x450x200 | 845x363x702 | 220 / 50Hz | 220 / 50Hz | **2.151 €** |
| CTBA 53 W<br>CTBA 53 W | COUR N 105K | 5,3 / 10,5 | 880x674x210 | 946x410x810 | 220 / 50Hz | 220 / 50Hz | **2.968 €** |
| CTBA 53 W<br>CTBA 53 W | COUR N 105T | 5,3 / 10,5 | 880x674x210 | 946x410x810 | 220 / 50Hz | 380 / 3Fases+N / 50Hz | **3.053 €** |
| CTBA 70 W<br>CTBA 70 W | COUA 140T | 7,1 / 14,1 | 1000x774x249 | 980x375x975 | 220 / 50Hz | 380 / 3Fases+N / 50Hz | **4.130 €** |
| CTBA 88 W<br>CTBA 88 W | COUA 160T | 8,8 / 16,0 | 1360x774x249 | 980x375x975 | 220 / 50Hz | 380 / 3Fases+N / 50Hz | **4.701 €** |



## Cassette Twin Combinations

| Indoor Units | Outdoor Units | Capacity IDU / ODU | Dimentions IDU | Dimentions ODU | Power Supply IDUs | Power Supply ODU | Price |
|---|---|---|---|---|---|---|---|
| | | kW | mm | mm | | | |
| CASG 70<br>CASG 70 | COUA 140T | 7,1 / 14,1 | 830x830x205 | 980x375x975 | 220 / 50Hz | 380 / 3Fases+N / 50Hz | **4.420 €** |
| CASG 88<br>CASG 88 | COUA 160T | 8,8 / 16,0 | 830x830x245 | 980x375x975 | 220 / 50Hz | 380 / 3Fases+N / 50Hz | **4.815 €** |




## Floor-ceiling Twin Combinations

| Indoor Units | Outdoor Units | Capacity IDU / ODU | Dimentions IDU | Dimentions ODU | Power Supply IDUs | Power Supply ODU | Price |
|---|---|---|---|---|---|---|---|
| | | kW | mm | mm | | | |
| FLCE N 53<br>FLCE N 53 | COUR N 105K | 5,3 / 10,5 | 1068x675x235 | 946x410x810 | 220 / 50Hz | 220 / 50Hz | **3.136 €** |
| FLCE 53<br>FLCE 53 | COUR N 105T | 5,3 / 10,5 | 1068x675x235 | 946x410x810 | 220 / 50Hz | 380 / 3Fases+N / 50Hz | **3.221 €** |
| FLCE 70<br>FLCE 70 | COUA 140T | 7,1 / 14,1 | 1068x675x235 | 980x375x975 | 220 / 50Hz | 380 / 3Fases+N / 50Hz | **4.258 €** |

# VRF – Outdoor units



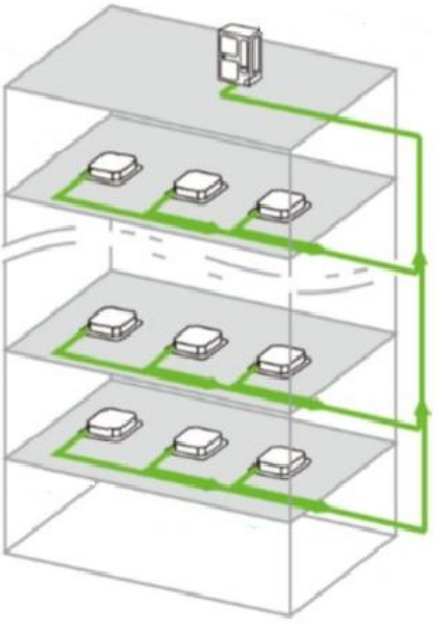

## R410a

| Indoor Units | Model | Capacity kW F/C | Power Input kW F/C | SEER / SCOP | Static Pressure Pa | Weight kg | Dimensions mm | IDU max. | Power Supply | Price |
|---|---|---|---|---|---|---|---|---|---|---|
| CENTRIFUGE | CVR-GCHV-V100W | 10 / 11,2 | 4,3 / 4,1 | 6,5 / 4,2 | 90 | 141 | 1520x976x584 | 5 | 220~240V/1Ph | **5.697 €** |
| | CVR-GCHV-V140W | 14 / 14 | 5,0 / 4,6 | 5,8 / 3,5 | 90 | 173 | 1516x973x584 | 8 | 380~415V/3P+N | **6.576 €** |
| | CVR-GCHV-V160W | 16 / 16 | 6,0 / 5,3 | 5,6 / 3,5 | 90 | 173 | 1516x973x584 | 9 | 380~415V/3P+N | **7.042 €** |
| | CVR-GCHV-V220W | 22 / 24 | 6,4 / 9,5 | 5,1 / 3,5 | 90 | 300 | 2000x1656x675 | 13 | 380~415V/3P+N | **10.980 €** |
| MINI-INDUSTRIAL | CVR-DH125W / R1 | 12,5 / 14 | 3,2 / 3,5 | 3,9 / 4,0 | | 85 | 1100x870x528 | 6 | 220~240V/1Phase | **3.262 €** |
| | CVR-DH140W / R1 | 14 / 16 | 3,8 / 4,0 | 3,7 / 4,0 | | 90 | 1100x870x528 | 7 | 220~240V/1Phase | **3.618 €** |
| | CVR-DH160W / R1 | 16 / 17 | 4,8 / 3,9 | 3,4 / 3,9 | | 90 | 1100x870x528 | 8 | 220~240V/1Phase | **5.389 €** |
| | CVR-D180W / HZR1-50D | 18 / 20 | 5,2 / 5,0 | 3,47 / 3,56 | | 95 | 975x1335x400 | 10 | 380~415V/3P+N | **4.279 €** |
| | CVR-D224W / HZR1-80 | 22,4 / 24 | 6,8 / 5,6 | 3,32 / 4,27 | | 113 | 1015x1430x450 | 13 | 380~415V/3P+N | **5.389 €** |
| | CVR-D260W / HZR1-100 | 26 / 28,5 | 7,5 / 6,8 | 3,45 / 4,21 | | 142 | 1120x1549x528 | 15 | 380~415V/3P+N | **5.563 €** |
| | CVR-D280W / HZR1-100 | 28 / 31,5 | 8 / 8,2 | 3,72 / 3,95 | | 142 | 1120x1549x528 | 16 | 380~415V/3P+N | **7.004 €** |
| MODULAR FULL INV. | CVR-E450W / HZR1-DM01 | 45 / 50 | 12,6 / 11,9 | 3,54 / 4,02 | 85 | 275 | 1340x1740x840 | 26 | 380~415V/3P+N | **13.249 €** |
| | CVR-E560W / HZR1-DM01 | 56 / 63 | 15,9 / 15,4 | 4,04 / 4,38 | 85 | 290 | 1340x1740x840 | 32 | 380~415V/3P+N | **15.897 €** |

*: Precharge to 0 meters. it is necessary to add gas and calculate the refrigerant pipes based on the length of the installation.
Further information is available in the technical documentation or from our technical department at dto.tecnico@coolwell.es

# VRF – Indoor Units

| Indoor Units | Model | Capacity | Airflow | Static Pressure | Weight | Piping Liquid Gas | Dimensions | | Price |
|---|---|---|---|---|---|---|---|---|---|
| CASSETTE 60x60 | CVR-V28Q4/HR1-B | 2,8 / 3,2 | 447 | | 17,5 | 1/4" - 3/8" | 653x585x267 |  | **885 €** |
| | CVR-V36Q4/HR1-B | 3,6 / 4 | 515 | | 17,5 | 1/4" - 1/2" | 653x585x267 | | **917 €** |
| | CVR-V45Q4/HR1-B | 4,5 / 5,0 | 515 | | 17,5 | 1/4" - 1/2" | 653x585x267 | | **955 €** |
| | Panel | | | | 8 | | 650x650x30 | | included |
| CASSETTE 90x90 | CVR-V56QR/HR1 | 5,6 / 6,3 | 860 | | 24 | 1/4" - 1/2" | 833x232x900 |  | **1.009 €** |
| | CVR-V71QR/HR1 | 7,1 / 8,0 | 1200 | | 24 | 3/8" - 5/8" | 833x232x900 | | **1.042 €** |
| | CVR-V100QR/HR1 | 10 / 11 | 1400 | | 28,5 | 3/8" - 5/8" | 833x232x900 | | **1.193 €** |
| | CVR-V125QR/HR1 | 12,5 / 16,0 | 1400 | | 28,5 | 3/8" - 5/8" | 833x232x900 | | **1.283 €** |
| | CVR-V140QR/HR1 | 14,0 / 16,0 | 1800 | | 28,5 | 3/8" - 5/8" | 833x232x900 | | **1.341 €** |
| | CVR-V160QR/HR1 | 16,0 / 16,0 | 1800 | | 28,5 | 3/8" - 5/8" | 833x232x900 | | **1.351 €** |
| | Panel | | | | | | 950x950x50 | | included |
| HIGHWALL | CVR-D28G/HR1-GSB | 2,8 / 3,2 | 540 | | 12 | 3/8" - 1/4" | 900x290x210 |  | **527 €** |
| | CVR-D36G/HR1-GSB | 3,6 / 4 | 600 | | 12 | 1/2" - 1/4" | 900x290x210 | | **582 €** |
| | CVR-D56G/HR1-GSC | 5,6 / 6,2 | 920 | | 16 | 1/2" - 1/4" | 1080x310x230 | | **623 €** |
| | CVR-D71G/HR1-GSC | 7,1 / 7,8 | 920 | | 16 | 5/8" - 3/8" | 1080x310x230 | | **668 €** |
| FLOOR-CEILING | CVR-V90UA/HR1-LDBC | 9 / 10 | 1500 | | 38 | 5/8" - 3/8" | 1270x340x260 |  | **1.004 €** |
| | CVR-V140UA/HR1-LDBC | 14 / 15 | 2300 | | 51 | 5/8" - 3/8" | 1660x640x260 | | **1.103 €** |
| | CVR-V160UA/HR1-LDBC | 16 / 17 | 2300 | | 51 | 5/8" - 3/8" | 1660x640x260 | | **1.177 €** |
| LOW PRESSURE DUCTED | CVR-V36TA/HR1-C | 3,6 / 4 | 550 | 30 | 16 | 1/2" - 1/4" | 700x2100x470 |  | **597 €** |
| | CVR-V56TA/HR1-C | 5,6 / 6,3 | 900 | 30 | 19 | 1/2" - 1/4" | 900x2100x470 | | **704 €** |
| MIDDLE PRESSURE DUCTED | CVR-V71TB/HR1-B | 7,1 / 8 | 1220 | 70 | 33 | 5/8" - 3/8" | 1210x260x680 |  | **826 €** |
| | CVR-V100TB/HR1-B | 10 / 11 | 2000 | 70 | 46 | 5/8" - 3/8" | 1450x260x680 | | **1.046 €** |
| | CVR-V120TB/HR1-B | 12 / 13 | 2000 | 70 | 46 | 5/8" - 3/8" | 1450x260x680 | | **1.091 €** |
| | CVR-V150TB/HR1-B | 15 / 17 | 2000 | 70 | 46 | 5/8" - 3/8" | 1450x260x680 | | **1.110 €** |

| Accesories | | Price | |
|---|---|---|---|
| ZKX-CMTE-06 | Wired controller | **83 €** |  |
| SP-D184 | Single group controller | **244 €** |  |
| CPJ-JKQ-013 | Touchscreen controller | **883 €** |  |
| SP-D120 | Electricity Consumption Meter (for ODU VRF/Top Discharge) 380 V / 3N / 100 A | **295 €** |  |
| CSP-D174-01P | BMS interface with direct MODBUS gateway | **11.254 €** |  |

| Connectors | | kW ODU | Price | |
|---|---|---|---|---|
| SP-FQG-N01D | Y-connector | <16kW | **55 €** |  |
| SP-FQG-N02D | Y-connector | 16 to 33kW | **77 €** | |
| SP-FQG-N03D | Y-connector | 33 to 66kW | **96 €** |  |
| SP-FQG-N04D | Y-connector | 66 to 92 kW | **139 €** | |



coolwell

# Monobloc Heat Pump CHPX





2026 NEW RELEASE

HIGH EFFICIENCY A+++

3-zone Control

Online update (OTA)



## Tmax 80ºC Heating
## Tmax 70ºC Domestic Hot Water

Three-phase ODU

| Model | | | CHPX-6 | CHPX-8 | CHPX-10 | CHPX-12 | CHPX-14 | CHPX-16 | CHPX-12T | CHPX-14T | CHPX-16T |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Heating Outdoor 7ºC Leaving Water 35ºC | Capacity | kW | 6,2 | 8,0 | 9,5 | 12,0 | 14,0 | 15,0 | 12,0 | 14,0 | 15,0 |
| | Consumption | kW | 1,3 | 1,6 | 2,1 | 2,5 | 3,1 | 3,4 | 2,5 | 3,1 | 3,4 |
| | COP | | 4,9 | 5,0 | 4,6 | 4,8 | 4,6 | 4,4 | 4,8 | 4,6 | 4,4 |
| Heating Outdoor 7ºC Leaving Water 45ºC | Capacity | kW | 6,2 | 8,0 | 9,5 | 12,0 | 14,0 | 15,0 | 12,0 | 14,0 | 15,0 |
| | Consumption | kW | 1,6 | 2,1 | 2,6 | 3,0 | 3,6 | 4,3 | 3,0 | 3,6 | 4,3 |
| | COP | | 3,8 | 3,8 | 3,7 | 4,0 | 3,9 | 3,5 | 4,0 | 3,9 | 3,5 |
| Heating Outdoor 7ºC Leaving Water 55ºC | Capacity | kW | 6,0 | 8,0 | 9,5 | 12,0 | 14,0 | 15,0 | 12,0 | 14,0 | 15,0 |
| | Consumption | kW | 1,9 | 2,5 | 3,1 | 3,8 | 4,5 | 5,2 | 3,8 | 4,5 | 5,2 |
| | COP | | 3,1 | 3,2 | 3,1 | 3,2 | 3,1 | 2,9 | 3,2 | 3,1 | 2,9 |
| Cooling Outdoor 35ºC Leaving Water 18ºC | Capacity | kW | 6,0 | 8,3 | 10,0 | 12,0 | 14,0 | 16,0 | 12,0 | 14,0 | 16,0 |
| | Consumption | kW | 1,3 | 1,7 | 2,2 | 2,7 | 3,3 | 4,2 | 2,7 | 3,3 | 4,2 |
| | EER | | 4,5 | 5,0 | 4,6 | 4,5 | 4,2 | 3,8 | 4,5 | 4,2 | 3,8 |
| Cooling Outdoor 35ºC Leaving Water 7ºC | Capacity | kW | 6,0 | 7,2 | 8,8 | 11,6 | 13,0 | 14,0 | 11,6 | 13,0 | 14,0 |
| | Consumption | kW | 2,0 | 2,2 | 2,8 | 3,9 | 4,6 | 5,2 | 3,9 | 4,6 | 5,2 |
| | EER | | 3,0 | 3,3 | 3,1 | 3,0 | 2,8 | 2,7 | 3,0 | 2,8 | 2,7 |
| SCOP | Leaving Water 35ºC | | 4,9 | 5,3 | 4,8 | 4,7 | 4,6 | 4,5 | 4,8 | 4,7 | 4,5 |
| | Leaving Water 55ºC | | 3,8 | 3,9 | 3,9 | 3,8 | 3,7 | 3,7 | 3,8 | 3,7 | 3,7 |
| SEER | Leaving Water 18ºC | | 8,5 | 8,3 | 8,0 | 7,3 | 7,1 | 6,3 | 7,3 | 7,1 | 6,3 |
| | Leaving Water 7ºC | | 5,5 | 5,8 | 5,6 | 5,2 | 5,1 | 4,8 | 5,2 | 5,1 | 4,8 |
| Seasonal Energy Efficiency (Heating) | Leaving Water 35ºC | | A+++ | A+++ | A+++ | A+++ | A+++ | A+++ | A+++ | A+++ | A+++ |
| | Leaving Water 55ºC | | A++ | A+++ | A+++ | A++ | A++ | A++ | A++ | A++ | A++ |
| Monobloc Outdoor Unit | Sound Pressure Level (Max) | dB(A) | 46 | 48 | 49 | 51 | 53 | 55 | 51 | 53 | 55 |
| | Sound Power Level (Max) | dB(A) | 59 | 60 | 61 | 64 | 66 | 68 | 64 | 66 | 68 |
| | Dimensions | mm | 1220×704×390 | 1293x860x523 | 1293x860x523 | 1293x860x523 | 1293x860x523 | 1293x860x523 | 1293x860x523 | 1293x860x523 | 1293x860x523 |
| | Net Weight | kg | 76 | 104 | 104 | 117 | 117 | 117 | 129 | 129 | 129 |
| | Dimensions Packaging | mm | 1315×810×430 | 1395x996x550 | 1395x996x550 | 1395x996x550 | 1395x996x550 | 1395x996x550 | 1395x996x550 | 1395x996x550 | 1395x996x550 |
| | Net Weight w/Packaging | kg | 87 | 125 | 125 | 138 | 138 | 138 | 150 | 150 | 150 |
| Gas | Refrigerant charge | kg | 0,74 | 1,1 | 1,1 | 1,25 | 1,25 | 1,25 | 1,25 | 1,25 | 1,25 |
| Water Circuit | Connections | inches | R5/4" | R5/4" | R5/4" | R5/4" | R5/4" | R5/4" | R5/4" | R5/4" | R5/4" |
| | Additional electrical heater (optional) | kW | 3 | 3 | 3 | 3 | 3 | 3 | 6/9 | 6/9 | 6/9 |
| | Setting Temperature | Cooling °C | 5~20 | 5~20 | 5~20 | 5~20 | 5~20 | 5~20 | 5~20 | 5~20 | 5~20 |
| | | Heating °C | 25~80 | 25~80 | 25~80 | 25~80 | 25~80 | 25~80 | 25~80 | 25~80 | 25~80 |
| | | Domestic water. °C | 20~70 | 20~70 | 20~70 | 20~70 | 20~70 | 20~70 | 20~70 | 20~70 | 20~70 |
| Operational range | Outdoor Temperature | Cooling °C | -5 ~ 46 | -5 ~ 46 | -5 ~ 46 | -5 ~ 46 | -5 ~ 46 | -5 ~ 46 | -5 ~ 46 | -5 ~ 46 | -5 ~ 46 |
| | | Heating °C | -25 ~ 35 | -25 ~ 35 | -25 ~ 35 | -25 ~ 35 | -25 ~ 35 | -25 ~ 35 | -25 ~ 35 | -25 ~ 35 | -25 ~ 35 |
| | | Domestic water. °C | -25 ~ 43 | -25 ~ 43 | -25 ~ 43 | -25 ~ 43 | -25 ~ 43 | -25 ~ 43 | -25 ~ 43 | -25 ~ 43 | -25 ~ 43 |
| Price | | | **3.511 €** | **3.998 €** | **4.442 €** | **5.198 €** | **5.422 €** | **5.598 €** | **5.511 €** | **5.733 €** | **5.998 €** |

# Monobloc Heat Pump CHPX

## High Efficiency A+++ at 55ºC leaving water




2026 NEW RELEASE
HIGH EFFICIENCY A+++
3-zone Control
Online update (OTA)



## Tmax 80ºC Heating
## Tmax 70ºC Domestic Hot Water

| Model | | | CHPX HE-6 | CHPX HE-8 | CHPX HE-10 | CHPX HE-12 | CHPX HE-14 | CHPX HE-16 |
|---|---|---|---|---|---|---|---|---|
| **Heating Outdoor 7ºC Leaving Water 35ºC** | Capacity | kW | 6,2 | 8,0 | 10,0 | 12,0 | 14,0 | 16,0 |
| | Consumption | kW | 1,2 | 1,5 | 2,0 | 2,3 | 2,8 | 3,3 |
| | COP | | 5,4 | 5,3 | 5,0 | 5,2 | 5,0 | 4,9 |
| **Heating Outdoor 7ºC Leaving Water 45ºC** | Capacity | kW | 6,4 | 8,2 | 10,0 | 12,0 | 14,0 | 16,0 |
| | Consumption | kW | 1,6 | 2,0 | 2,5 | 2,9 | 3,5 | 4,2 |
| | COP | | 4,0 | 4,1 | 4,0 | 4,1 | 4,0 | 3,8 |
| **Heating Outdoor 7ºC Leaving Water 55ºC** | Capacity | kW | 6,1 | 8,0 | 10,0 | 12,0 | 14,0 | 16,0 |
| | Consumption | kW | 1,8 | 2,4 | 3,1 | 3,6 | 4,4 | 5,2 |
| | COP | | 3,5 | 3,4 | 3,3 | 3,3 | 3,2 | 3,1 |
| **Cooling Outdoor 35ºC Leaving Water 18ºC** | Capacity | kW | 6,5 | 8,5 | 10,0 | 12,0 | 14,0 | 16,0 |
| | Consumption | kW | 1,3 | 1,6 | 2,1 | 2,3 | 2,9 | 3,6 |
| | EER | | 5,1 | 5,4 | 4,8 | 5,2 | 4,8 | 4,4 |
| **Cooling Outdoor 35ºC Leaving Water 7ºC** | Capacity | kW | 6,8 | 8,0 | 9,0 | 12,0 | 13,0 | 14,0 |
| | Consumption | kW | 2,1 | 2,4 | 2,9 | 3,4 | 3,8 | 4,2 |
| | EER | | 3,3 | 3,4 | 3,1 | 3,5 | 3,5 | 3,3 |
| **SCOP** | Leaving Water 35ºC | | 5,6 | 5,4 | 5,3 | 5,1 | 4,9 | 4,9 |
| | Leaving Water 55ºC | | 4,3 | 4,1 | 4,0 | 3,9 | 3,9 | 3,9 |
| **SEER** | Leaving Water 18ºC | | 8,0 | 5,8 | 5,6 | 9,7 | 9,3 | 9,0 |
| | Leaving Water 7ºC | | 5,5 | 7,9 | 7,7 | 6,1 | 6,0 | 5,9 |
| **Seasonal Energy Efficiency (Heating)** | Leaving Water 35ºC | | A+++ | A+++ | A+++ | A+++ | A+++ | A+++ |
| | Leaving Water 55ºC | | A+++ | A+++ | A+++ | A+++ | A+++ | A+++ |
| **Monobloc Outdoor Unit** | Sound Pressure Level (Max) | dB(A) | 40 | 40 | 41 | 43 | 46 | 49 |
| | Sound Power Level (Max) | dB(A) | 53 | 53 | 54 | 55 | 57 | 59 |
| | Dimensions | mm | 1293×860×523 | 1336×1061×552 | 1336×1061×552 | 1336×1061×552 | 1336×1061×552 | 1336×1061×552 |
| | Net Weight | kg | 109 | 165 | 165 | 165 | 165 | 165 |
| | Dimensions Packaging | mm | 1395×996×550 | 1410×1230×570 | 1410×1230×570 | 1410×1230×570 | 1410×1230×570 | 1410×1230×570 |
| | Net Weight w/Packaging | kg | 130 | 190 | 190 | 190 | 190 | 190 |
| **Gas** | Refrigerant charge | kg | 0,8 | 1,1 | 1,1 | 1,35 | 1,35 | 1,35 |
| **Water Circuit** | Connections | inches | R5/4” | R5/4” | R5/4” | R5/4” | R5/4” | R5/4” |
| | Additional electrical heater (optional) | kW | 3 | 3 | 3 | 3 | 3 | 3 |
| | Setting Temperature | Cooling °C | 5~20 | 5~20 | 5~20 | 5~20 | 5~20 | 5~20 |
| | | Heating °C | 25~80 | 25~80 | 25~80 | 25~80 | 25~80 | 25~80 |
| | | Domestic water. °C | 20~70 | 20~70 | 20~70 | 20~70 | 20~70 | 20~70 |
| **Operational range** | Outdoor Temperature | Cooling °C | -5 ~ 46 | -5 ~ 46 | -5 ~ 46 | -5 ~ 46 | -5 ~ 46 | -5 ~ 46 |
| | | Heating °C | -25 ~ 35 | -25 ~ 35 | -25 ~ 35 | -25 ~ 35 | -25 ~ 35 | -25 ~ 35 |
| | | Domestic water. °C | -25 ~ 43 | -25 ~ 43 | -25 ~ 43 | -25 ~ 43 | -25 ~ 43 | -25 ~ 43 |
| **Price** | | | **4.108 €** | **4.678 €** | **5.197 €** | **6.082 €** | **6.344 €** | **6.548 €** |

# Hybrid Heat Pumps CWTP+CHPP


## OUTDOOR UNIT: DC INVERTER HEAT PUMP UNIT FOR COOLING, HEATING AND DOMESTIC HOT WATER

| Model | CHPP-06K | CHPP-09K | CHPP-12T | CHPP-16T |
|---|---|---|---|---|
| Heating Mode - Outdoor Temperature (DB/WB): 7/6 °C, Water Temperature (in/out): 30/35 °C | | | | |
| Heating Capacity Range (kW) | 3.0~8.3 | 4.1~11.4 | 6.36~15.37 | 6.26~19.34 |
| Heating Power Input Range (kW) | 0.59~1.81 | 0.81~2.62 | 1.22~3.17 | 1.26~4.40 |
| COP Range | 4.59~5.08 | 4.35~5.06 | 4.85~5.21 | 4.40~4.98 |
| Heating Mode - Outdoor Temperature (DB/WB): 7/6 °C, Water Temperature (in/out): 47/55 °C | | | | |
| Heating Capacity Range (kW) | 2.7~7.2 | 3.6~9.6 | 5.62~14.15 | 5.46~15.19 |
| Heating Power Input Range (kW) | 0.83~2.39 | 1.14~3.40 | 1.80~4.58 | 1.81~5.08 |
| COP Range | 3.01~3.25 | 2.82~3.16 | 3.09~3.12 | 2.99~3.02 |
| Domestic Water Mode - Outdoor Temperature (DB/WB) 20/15°C, Water Temperature (in/out): 15/55°C | | | | |
| Heating Capacity Range (kW) | 4.0~8.8 | 5.3~11.8 | 7.2~15.7 | 7.6~18.6 |
| Heating Power Input Range (kW) | 0.80~1.93 | 1.08~2.71 | 1.51~3.67 | 1.58~4.31 |
| COP Range | 4.56~4.99 | 4.35~4.91 | 4.28~4.77 | 4.32~4.81 |
| Leaving Domestic Water (L/h) | 189 | 254 | 338 | 400 |
| Cooling Mode - Outdoor Temperature (DB/WB) 35/24 °C, Water Temperature (in/out): 12/7 °C | | | | |
| Cooling Capacity Range (kW) | 2.0~5.8 | 3.3~8.5 | 4.81~12.3 | 4.12~12.86 |
| Cooling Power Input Range (kW) | 0.60~1.81 | 0.86~2.57 | 1.37~4.09 | 1.31~4.68 |
| EER Range | 3.20~3.33 | 3.31~3.84 | 3.01~3.51 | 2.75~3.15 |
| Cooling Mode - Outdoor Temperature (DB/WB) 35/24 °C, Water Temperature (in/out): 23/18 °C | | | | |
| Cooling Capacity Range (kW) | 3.3~7.9 | 5.1~11.7 | 7.23~12.4 | 5.98~14.3 |
| Cooling Power Input Range (kW) | 0.59~1.86 | 0.85~2.63 | 1.32~2.88 | 1.24~4.13 |
| EER Range | 4.25~5.59 | 4.45~6.00 | 4.30~5.46 | 3.46~4.82 |
| Electric System | 230V/1Ph/50Hz/60Hz | | 380V/3Ph/50-60Hz | |
| ErP (mild climate, W35) | A+++ | | | |
| ErP (mild climate, W55) | A+++ | | | |
| Power Input Max (kW) | 3.0 | 4.1 | 6.0 | 6.3 |
| Current Max (A) | 13.7 | 18.8 | 11.9 | 12.5 |
| Airflow (m3/h) | 1.43 | 1.96 | 2.06 | 2.44 |
| Pressure Domestic Water (max) kPa | 25 | 30 | 32 | 33 |
| IP protection level | IPX4 | | | |
| Anti-electric shock rate | I | | | |
| Diameter of pipes (mm) | DN25 | | | |
| Compressor | MITSUBISHI ELECTRIC | | | |
| Net Weight (kg) | 122 | 133 | 159 | 169 |
| Tamaño (WxDxH) (mm) | 1202×528×1060 | 1202×528×1060 | 1147×539×1396 | 1147×539×1396 |
| Operation Ambient Temp. (°c) | -25~43 | | | |
| Operating Water Temperature (°c) | 25~75(Domestic Hot Water) | | | |
| Operating Water Temperature (°c) | 25~75(Heating) | | | |
| Operating Water Temperature (°c) | 5~30(Cooling) | | | |



## INDOOR UNIT: ALL-INCLUDED DOMESTIC HOT WATER TANK

| Model | CWTP-190L | CWTP-240L |
|---|---|---|
| 3-WAY VALVE | ACOL/DN25 | ACOL/DN25 |
| Water Tank | 190L | 240L |
| Electric Resistance | 3kW+3kW/220V | |
| DC Inverter Water Pump | Shimge | |
| Max water head(m) | 12 | |
| Inertia Tank (L) | 30 | |
| Expansion Tank (L) | 8 | |
| Max operating temperature (°c) | 75 | |
| Max operating pressure (MPa) | 1 | |
| Diameter of pipes (mm) | 4-DN25/2-DN15 | |
| Safety valve (MPa) | 0.3 | |
| Leakage Switch (A) | Schneider/40A | |
| Cabinet | Acero galvanizado epoxi | |
| Package | Entablillado/Carton | |
| Power Supply | 230V/1Ph/50-60Hz | 380V/3Ph/50-60Hz |
| Sound level dB(A) | ≤45 | |
| Net Weight (kg) | 165 | 200 |
| Weight bruto(kg) | 190 | 230 |
| Net Dimensions (mm) | 640x598x1850 | 640x598x2135 |
| Dimensions w/Packaging (mm) | 710x638x1970 | 710x638x2255 |
| Applicable Models | 6 & 9 Single phase | 12 & 16 Three-phase |

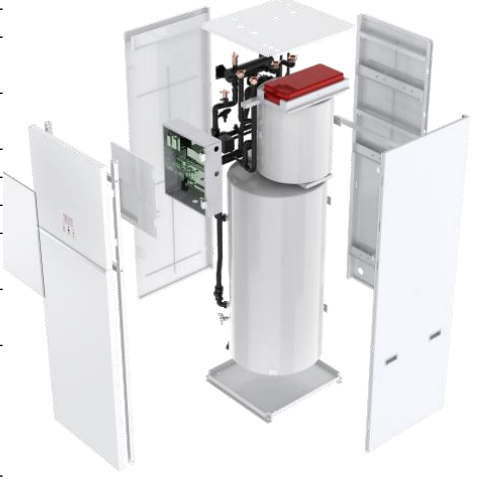

# DHW Tank Heat Pump Wifi incl.

MODELS 200l y 300l
with solar coil







**R134a**

| Model | Capacity | Capacity | Power Input | COP | Electrical heater | Temp. | T.max (pump only) | Sound Power Level | Solar coil | Dimensions | Price |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | liter | kW | kW | | kW | ºC | ºC | dB(A) | | mm | |
| BCACS100L W | 100 | 1,03 | 0,25 | 4,16 | 6,80 | 40~60 | 70 | 44 | no | ø565-1275 | **1.565 €** |
| BCACS200L W | 200 | 2,02 | 0,486 | 4,16 | 6,80 | 40~60 | 70 | 46 | sí | ø615-1870 | **2.376 €** |
| BCACS300L W | 300 | 2,02 | 0,49 | 4,16 | 6,80 | 40~60 | 70 | 46 | sí | ø695-1975 | **2.816 €** |

Outdoor temperature range -5 ~ 43ºC

# Swimmingpool Heat Pump Wifi incl.





Anti-corrosion
protection

**R32 Inverter**

| Model | Capacity | EER / COP | Recomended Water volume | Consumption | Dimensions | Price |
|---|---|---|---|---|---|---|
| | kW F / C | | m3 | kW F / C | mm | |
| AHPP 7 | 3,8 / 7,5 | 4,25 / 6,13 | 18 ~ 35 | 0,9 / 1,14 | 880-383-632 | **1.577 €** |
| AHPP 14 | 7,9 / 14,3 | 4,44 / 6,16 | 40 ~ 80 | 1,78 / 2,32 | 951-368-719 | **2.250 €** |
| AHPP 23 | 12,5 / 23 | 5,14 / 6 | 60 ~ 115 | 2,45 / 3,83 | 1090-421-728 | **3.080 €** |

# Heating units VOLCANO



| Model | Capacity range | Airflow | Temp. Max | Power Input | Pressure Max | Horizontal reach | Vertical reach | Dimensions | Price |
|---|---|---|---|---|---|---|---|---|---|
| | kW F/C | m3/h | ºC | kW | MPa | m | m | m | |
| VOLCANO VR Mini EC | 3~20 | 2100 | 130 ºC | 0,10 | 1,60 | 14 | 8 | 530x530x517 | **678 €** |
| VOLCANO VR1 EC | 5~30 | 5300 | 130 ºC | 0,25 | 1,60 | 23 | 12 | 700x700x610 | **1.012 €** |
| VOLCANO VR2 EC | 8~50 | 4850 | 130 ºC | 0,25 | 1,60 | 22 | 11 | 700x700x610 | **1.098 €** |
| VOLCANO VR3 EC | 13~75 | 5700 | 130 ºC | 0,37 | 1,60 | 25 | 12 | 700x700x610 | **1.218 €** |
| VOLCANO VR D Mini EC | - | 2330 | - | 0,09 | - | 16 | 10 | 700x700x610 | **601 €** |
| VOLCANO VR / D EC | - | 6500 | - | 0,37 | - | 28 | 15 | 700x700x610 | **916 €** |

## ACCESORIES


| Engine | Code | Description | Price |
|---|---|---|---|
| EC | 1-4-0101-0453 | Potenciometer VR EC (0-10V) | **50,68 €** |
| EC | 1-4-0101-0473 | Potenciometer VR EC (0-10V) with Temp sensor | **61,33 €** |
| EC | 1-4-2801-0157 | Controller HMI Volcano EC | **151,14 €** |
| EC | 1-2-1205-0007 | Room Sensor Temperature NTC IP66 | **32,86 €** |
| EC | 1-2-1204-2019 | Motorized valve | **111,71 €** |
| EC | 1-2-2701-0381 | Wall-mounted support | **9,52 €** |
| AC | 1-4-0101-0438 | Wall Controller IP30 | **26,67 €** |
| AC | 1-4-0101-0434 | Speed Regulator ARW3,0 / 2 (IP54) | **140,19 €** |
| AC | 1-4-0101-0038 | Room thermostat VR (IP30) | **24,76 €** |
| AC | 1-4-0101-0167 | Controller ARW 0,6 (IP54) | **76,67 €** |

# Industrial Air Cooling




| Model | Capacity kW | Power Input kW | Airflow m3/h | Pressure Pa | Air Outlet | Outlet Area | Water Consumption l / h | Fan | Power Supply V / Phase / Hz | Dimensions | Coverage m2 | Price |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| CW19-D-Black | 16,74 | 1,1 | 19000 | 180 | Bottom | 670x670 | 25 ~ 30 | Axial | 220/1F/50 | 1100x110x955 | 100 ~ 120 | **4.660 €** |
| CW19-T-Black | 16,74 | 1,1 | 19000 | 180 | Top | 670x670 | 25 ~ 30 | Axial | 220/1F/50 | 1100x110x955 | 100 ~ 120 | **5.332 €** |
| CW19-S-Black | 16,74 | 1,1 | 19000 | 180 | Side | 670x670 | 25 ~ 30 | Axial | 220/1F/50 | 1100x110x955 | 100 ~ 120 | **5.332 €** |
| CW31-D-Black | 27,4 | 3 | 31000 | 260 | Bottom | 800x800 | 30 ~ 50 | Axial | 380/3Fs/50 | 1350x1350x1250 | 250 ~ 300 | **8.275 €** |
| CW31-T- Black | 27,4 | 3 | 31000 | 260 | Top | 800x800 | 30 ~ 50 | Axial | 380/3Fs/50 | 1350x1350x1250 | 250 ~ 300 | **8.798 €** |
| CW50-D-Black | 44,19 | 4 | 50000 | 460 | Bottom | 900x900 | 40 ~ 70 | Axial | 380/3Fs/50 | 1500x1500x1450 | 300 ~ 350 | **10.397 €** |
| CW50-T-Black | 44,19 | 4 | 50000 | 460 | Top | 900x900 | 40 ~ 70 | Axial | 380/3Fs/50 | 1500x1500x1450 | 300 ~ 350 | **10.868 €** |

# Fancoil series C

| Model | Type | Maximum Capacity between models | | Water flow range | |
|---|---|---|---|---|---|
| | | Cooling (kW) | Heating (kW) | m3 / h | |
| CKT3 | DUCTED UNIT | 3,12 ~ 10,79 | 3,82 ~ 12,62 | 252 ~ 778 |  |
| C-GALILEO | HIGHWALL (Optional motorized air louver) | 1,3 ~ 3,8 | 1,5 ~ 4,3 | 252 ~ 778 |  |
| C-LIGHT | CASSETTE 60x60 90x90 | 1,6 ~ 8,3 | 2,6 ~ 14,0 | 610 ~ 1.820 |  |
| C-AIR | FLOOR-CEILING (Centrifugal fan coil unit, with / without casing) | 0,5 ~ 8,9 | 0,5 ~ 9,8 | 61 ~ 1.670 |  |
| C-VCE | FLOOR-CEILING (with / without casing) | 0,6 ~ 11,6 | 0,7 ~ 12,9 | 108 ~ 2.294 |  |
| C-ROMEO-ECM | FLOOR | 1,1 ~ 4,2 | | 205 ~ 645 |  |
| C-FRESH | HIGH PRESSURE DUCTED UNIT | 2,4 ~ 29,6 | 2,5 ~ 34,2 | 353 ~ 6.232 |  |
| C-UTC | HIGH STATIC PRESSURE LOW-PROFILE DUCTED UNIT (horizontal / vertical) | 2,5 ~ 42,0 | 2,8 ~ 46,9 | 491 ~ 7.985 |  |

# Industrial Fancoils FA/FP



**Series FA**



**Series FP**

Ducted unit, fan coil units without casing
Extended, insulated condensate tray
G2 filter suitable for vertical or horizontal installation
2-pipe / 4-pipe configuration
Wide capacity range available

| Model | | Instalation | Max capacity in smallest and largest models | | Water flow | Max Air flow |
|---|---|---|---|---|---|---|
| | | | Cooling (kW) | Heating (kW) | l/h | m3/h |
| **FA3V** | 6-speeds fan | 2 Pipes | 2.990 ~ 7.700 | 4.020 ~ 10.290 | 514 ~ 1.322 | 545 ~ 1.429 |
| | | 4 Pipes | | 3.100 ~ 7.770 | 272 ~ 684 | |
| **FAEC** | Regulated by EC-motor 0-10V | 2 Pipes | 2.350 ~ 6.040 | 3.100 ~ 7.950 | 403 ~ 1.037 | 393 ~ 1.023 |
| | | 4 Pipes | | 3.100 ~ 7.770 | 272 ~ 684 | |
| **FP3V** | 6-speeds fan | 2 Pipes | 9.200 ~ 31.460 | 11.840 ~ 40.890 | 1.579 ~ 5.400 | 1.475 ~ 5.239 |
| | | 4 Pipes | | 8.120 ~ 27.950 | 720 ~ 2.448 | |
| **FPEC** | Regulated by EC-motor 0-10V | 2 Pipes | 9.200 ~ 31.460 | 11.840 ~ 40.890 | 1.579 ~ 5.400 | 1.475 ~ 5.239 |
| | | 4 Pipes | | 8.120 ~ 27.950 | 720 ~ 2.448 | |

Available on request, supplied with control and control devices

# Configurable Chillers MEX VSX

## R32

| MODEL | Description | Capacity kW F/C | Price |
|---|---|---|---|
| MEX VSX 15 RH | Air-to-Water Heat Pump | 5,02 / 5,88 | 6.217 € |
| MEX VSX 16 RH | Air-to-Water Heat Pump | 6,08 / 7,58 | 6.486 € |
| MEX VSX 18 RH | Air-to-Water Heat Pump | 7,53 / 9,8 | 8.141 € |
| MEX VSX 18T RH | Air-to-Water Heat Pump – Three-Phase | 7,53 / 9,8 | 9.304 € |
| MEX VSX 19 RH | Air-to-Water Heat Pump | 8,51 / 11,5 | 8.230 € |
| MEX VSX 19T RH | Air-to-Water Heat Pump – Three-Phase | 8,51 / 11,5 | 9.080 € |
| MEX VSX 111 RH | Air-to-Water Heat Pump | 11,48 / 13,6 | 10.771 € |
| MEX VSX 111T RH | Air-to-Water Heat Pump – Three-Phase | 11,48 / 13,7 | 11.093 € |
| MEX VSX 114 RH | Air-to-Water Heat Pump | 13,08 / 15,8 | 11.136 € |
| MEX VSX 114T RH | Air-to-Water Heat Pump – Three-Phase | 13,08 / 15,8 | 10.981 € |
| MEX VSX 115T RH | Air-to-Water Heat Pump – Three-Phase | 15,0 / 17,3 | 11.280 € |
| MEX VSX 15 RH LT | Air-to-Water Heat Pump – Low Outdoor Temperature Version | 5,02 / 5,88 | 6.884 € |
| MEX VSX 16 RH LT | Air-to-Water Heat Pump – Low Outdoor Temperature Version | 6,08 / 7,58 | 7.215 € |
| MEX VSX 18 RH LT | Air-to-Water Heat Pump – Low Outdoor Temperature Version | 7,53 / 9,8 | 8.906 € |
| MEX VSX 18T RH LT | Air-to-Water Heat Pump – Low Outdoor Temperature Version – Three-Phase | 7,53 / 9,8 | 10.136 € |
| MEX VSX 19 RH LT | Air-to-Water Heat Pump – Low Outdoor Temperature Version | 8,51 / 11,5 | 9.044 € |
| MEX VSX 19T RH LT | Air-to-Water Heat Pump – Low Outdoor Temperature Version – Three-Phase | 8,51 / 11,5 | 10.315 € |
| MEX VSX 111 RH LT | Air-to-Water Heat Pump – Low Outdoor Temperature Version | 11,48 / 13,6 | 11.276 € |
| MEX VSX 111T RH LT | Air-to-Water Heat Pump – Low Outdoor Temperature Version – Three-Phase | 11,48 / 13,7 | 11.603 € |
| MEX VSX 114 RH LT | Air-to-Water Heat Pump – Low Outdoor Temperature Version | 13,08 / 15,8 | 11.647 € |
| MEX VSX 114T RH LT | Air-to-Water Heat Pump – Low Outdoor Temperature Version – Three-Phase | 13,08 / 15,8 | 11.491 € |
| MEX VSX 115T RH LT | Air-to-Water Heat Pump – Low Outdoor Temperature Version – Three-Phase | 15,0 / 17,3 | 11.783 € |
| MEX VSX 16 RH SL | Air-to-Water Heat Pump – Silent Version | 6,08 / 7,58 | 8.691 € |
| MEX VSX 19 RH SL | Air-to-Water Heat Pump – Silent Version | 7,53 / 9,8 | 10.774 € |
| MEX VSX 19T RH SL | Air-to-Water Heat Pump – Silent Version | 7,53 / 9,8 | 11.848 € |
| MEX VSX 114 RH SL | Air-to-Water Heat Pump – Silent Version | 8,51 / 11,5 | 14.190 € |
| MEX VSX 114T RH SL | Air-to-Water Heat Pump – Silent Version | 8,51 / 11,5 | 14.051 € |
| MEX VSX 16 RH SL LT | Air-to-Water Heat Pump – Silent Version + Low Outdoor Temperature Version | 6,08 / 7,58 | 9.211 € |
| MEX VSX 19 RH SL LT | Air-to-Water Heat Pump – Silent Version + Low Outdoor Temperature Version | 8,51 / 11,5 | 11.294 € |
| MEX VSX 19T RH SL LT | Air-to-Water Heat Pump – Silent Version + Low Outdoor Temperature Version – Three-Phase | 8,51 / 11,5 | 12.369 € |
| MEX VSX 114 RH SL LT | Air-to-Water Heat Pump – Silent Version + Low Outdoor Temperature Version | 13,08 / 15,8 | 14.711 € |
| MEX VSX 114T RH SL LT | Air-to-Water Heat Pump – Silent Version + Low Outdoor Temperature Version – Three-Phase | 13,08 / 15,8 | 14.573 € |





# Configurable Chillers MEX HP EA

## 400V/3Phase+N/50Hz

## R410a

| MODEL | Capacity kW F/C | Power Input kW F/C | EER / COP | Sound Pressure UE dB(A) | Dimensions mm | Weight kg | Price |
|---|---|---|---|---|---|---|---|
| MEX HP EA 17 | 15,1 / 17,4 | 5,81 / 5,4 | 2,6 / 3,23 | 48 | 1807-779-1687 | 325 | 23.588 € |
| MEX HP EA 20 | 17 / 20,1 | 6,9 / 6,1 | 2,47 / 3,29 | 48 | 1807-779-1687 | 328 | 23.611 € |
| MEX HP EA 25 | 22 / 26,5 | 8,4 / 8 | 2,62 / 3,32 | 51 | 1807-779-1687 | 362 | 24.808 € |
| MEX HP EA 28 | 25,2 / 31 | 9,9 / 9,1 | 2,55 / 3,4 | 50 | 2061-779-1687 | 381 | 26.793 € |
| MEX HP EA 33 | 28,5 / 35,7 | 11,9 / 10,5 | 2,39 / 3,4 | 51 | 2061-779-1687 | 392 | 27.044 € |
| MEX HP EA 36 | 31,1 / 39,6 | 14 / 12 | 2,22 / 3,3 | 52 | 2061-779-1687 | 392 | 27.591 € |
| MEX HP EA 39 | 33,3 / 42,5 | 15,5 / 12,9 | 2,15 / 3,3 | 52 | 2061-779-1687 | 394 | 28.016 € |
| MEX HP EA 45 | 40,4 / 48,6 | 16,56 / 15 | 2,44 / 3,24 | 53 | 2061-779-1687 | 570 | 30.799 € |
| MEX HP EA 50 | 45 / 54,4 | 19,65 / 17 | 2,29 / 3,2 | 53 | 2061-779-1687 | 580 | 31.219 € |
| MEX HP EA 55 | 50,1 / 57,1 | 17,77 / 17,4 | 2,82 / 3,27 | 54 | 2524-1038-1995 | 720 | 42.778 € |
| MEX HP EA 65 | 57,8 / 66,5 | 21,78 / 21,2 | 2,65 / 3,13 | 55 | 2524-1038-1995 | 731 | 42.862 € |
| MEX HP EA 80 | 71,2 / 79 | 25,05 / 24,9 | 2,84 / 3,17 | 57 | 2524-1038-1995 | 799 | 45.839 € |
| MEX HP EA 90 | 78,4 / 87,4 | 28,48 / 28 | 2,75 / 3,13 | 58 | 2524-1038-1995 | 805 | 46.535 € |





The unit is equipped as standard with the following features: Remote control display, Victaulic connection kit, flow switch, water filter, rubber anti-vibration supports, low ambient cooling kit, EC fans, electric heater with thermostat, over/under voltage protection relay with phase sequence monitoring. Low ambient heating kit for operation down to –15 °C.

# Configurable Chillers HP XEA DOMINO



Equipped with DSH scroll compressors, an electronic expansion valve, and high-efficiency axial fans.
A total of 11 basic models are available, ranging from 56 to 131 kW, which can be combined—up to a maximum of six units—to achieve the desired capacity.





FAST AND EASY HYDRAULIC CONNECTION: Modular configuration facilitated by the optional hydraulic connection kit.
EASY HANDLING: Compact and lightweight design optimizing overall dimensions.
EASY MAINTENANCE: Full accessibility to all components and a removable electrical panel for easy servicing.

AC axial fans, also available with brushless EC fans (additional reduction in power consumption and sound level).

**R454b**

| MODEL | Capacity kW F/C | Power Input kW F/C | EER / COP | Sound Pressure ODU dB(A) | Dimensions mm | Weight kg | Price |
|---|---|---|---|---|---|---|---|
| DOMINO HP XEA 55 | 49,8 / 54,6 | 16,5 / 17,4 | 3,02 / 3,13 | 55 | 2489x1004x2408 | 856 | **48.150 €** |
| DOMINO HP XEA 60 | 53,3 / 58,6 | 18 / 18,6 | 2,96 / 3,15 | 55 | 2489x1004x2408 | 863 | **48.362 €** |
| DOMINO HP XEA 65 | 58,5 / 64,9 | 20,4 / 20,5 | 2,87 / 3,16 | 56 | 2489x1004x2408 | 867 | **48.800 €** |
| DOMINO HP XEA 70 | 61,2 / 69 | 22 / 21,8 | 2,78 / 3,16 | 56 | 2489x1004x2408 | 875 | **49.188 €** |
| DOMINO HP XEA 75 | 66,3 / 72,4 | 23,6 / 22,3 | 2,81 / 3,24 | 56 | 2489x1004x2408 | 892 | **50.010 €** |
| DOMINO HP XEA 80 | 69,2 / 76,3 | 25,4 / 23,7 | 2,73 / 3,22 | 56 | 2489x1004x2408 | 899 | **50.900 €** |
| DOMINO HP XEA 85 | 76,7 / 83,7 | 25,6 / 26,6 | 2,99 / 3,15 | 58 | 2489x1004x2408 | 944 | **52.240 €** |
| DOMINO HP XEA 110 | 100 / 109 | 36,7 / 34,7 | 2,73 / 3,16 | 60 | 2489x1004x2408 | 1.066 | **57.059 €** |
| DOMINO HP XEA 120 | 108 / 120 | 41,4 / 38,1 | 2,61 / 3,15 | 60 | 2489x1004x2408 | 1.069 | **57.564 €** |
| DOMINO HP XEA 130 | 116 / 130 | 46,4 / 41,6 | 2,5 / 3,12 | 60 | 2489x1004x2408 | 1.073 | **58.124 €** |

# ROOFTOP AIRTOP

FEATURES:
- Extra-compact cabinet
- High efficiency levels
- Free-cooling economizer
- Thermodynamic heat recovery





**R454b**

| Model | Capacity kW F/C | Power Input kW F/C | SEER / SCOP | Efficiency Cooling/Heating % | Sound Pressure Level ODU dB(A) | Dimensions mm | Weight kg |
|---|---|---|---|---|---|---|---|
| IH017 R454B | 15,7 / 15 | 6,1 / 4,8 | 3,84 / 3,2 | 150,6 / 125,1 | 84,00 | 1397x2176x1169 | 445 |
| IH019 R454B | 17,6 / 16,7 | 6,4 / 5,2 | 3,86 / 3,21 | 151,4 / 125,5 | 85,00 | 1662x2368x1354 | 550 |
| IH023 R454B | 22 / 21,5 | 8 / 6,8 | 3,86 / 3,2 | 151,4 / 125,1 | 86,00 | 1662x2368x1354 | 550 |
| IH027 R454B | 25,1 / 25,2 | 10 / 8,4 | 3,84 / 3,2 | 150,8 / 125,2 | 88,00 | 1662x2368x1354 | 550 |
| IH030 R454B | 29,4 / 28,4 | 10 / 8,4 | 4,75 / 3,2 | 186,8 / 125,1 | 90,00 | 1722x2791x1832 | 730 |
| IH036 R454B | 34,2 / 33,9 | 12,6 / 10,2 | 4,6 / 3,21 | 181 / 125,2 | 90,00 | 1722x2791x1832 | 730 |
| IH051 R454B | 49,1 / 47,5 | 13,7 / 13,6 | 5,27 / 3,26 | 207,8 / 127,4 | 86,00 | 1565x2830x2250 | 891 |
| IH061 R454B | 58,8 / 57,7 | 19 / 16,7 | 5,05 / 3,26 | 199 / 127,4 | 88,00 | 1565x2830x2250 | 901 |

(1): Data according to nominal conditions EN 14511:2022(cooling: outdoor 35°C DB, indoor 27°C DB / 19°C WB; heating: outdoor 7°C DB / 6°C WB, indoor 20°C DB). Seasonal efficiency according to EN 14825:2022 (average climate)
(2): Sound power level according to ISO 9614:2009 (without accessories)

**Available capacities up to 250 kW**

# Residential Heat Recovery Units RCDC

## RUCT



m3/h 60

Decentralized heat recovery unit.

## RDCD20



m3/h 300

Centralized heat recovery unit without fans.

## RDCD25



m3/h 160

Centralized heat recovery unit.

## RDCD25SK



m3/h 180

Centralized heat recovery unit.

## RDCD25SKC



m3/h 180

Centralized heat recovery unit.

## RDCD25SKH



m3/h 250

Centralized heat recovery unit.

## RDCD25SKHC



m3/h 250

Centralized heat recovery unit.

## RDCD30SH




m3/h 227

Centralized heat recovery unit.

## RDCD40SK



m3/h 320

Centralized heat recovery unit.

## RDCD40SKC



m3/h 320

Centralized heat recovery unit.

## RDCD50SH




m3/h 370

Centralized heat recovery unit.

## RDCD500SK/C



m3/h 450

Centralized heat recovery unit.

Residential heat recovery units with dehumidification

## RDCD300HC



m3/h 300

Heat recovery unit with dehumidification system.

## RDCD300HCH



m3/h 300

Heat recovery unit with dehumidification system.


## RDCD500HCH



m3/h 500

Heat recovery unit with dehumidification system.

# Residential Heat Recovery Units RCDC

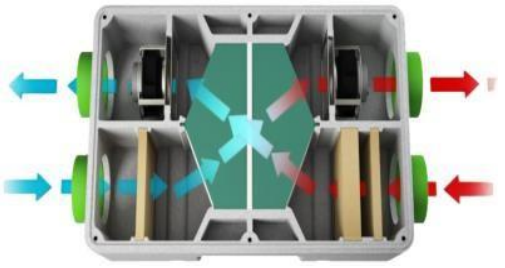

RDCD25

BEST SELLER &
PERFORMANCE

VIDEO RDCD25

| Model | Airflow* | Power Input | Class | Sound Power Level | Efficiency | Weight | Dimensions | Vertical / Horizontal | Control | By-pass autom. | Filters | Price |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| RUCTS | 60 | 8,9 | | 13-23 | 93 | 7,00 | 500x160D | - | IR | - | - | **823 €** |
| RDCD20 | 50~300 | - | | - | >90 | 7 | 670x550x255 | H | - | - | G4, F7 Opt. | **1.091 €** |
| RDCD25 | 30~160 | 27+27 | A | 49 | >90 | 10 | 900x550x255 | H | Proportional | - | G4, F7 Opt. | **1.270 €** |
| RDCD25SK | 30~180 | 27+27 | A | 46 | >90 | 14 | 1005x580x268 | V / H | 3V+Booster RF | Yes | G4, F7 Opt. | **2.110 €** |
| RDCD25SKE | 30~160 | 27+27 | A | 46 | >90 | 14 | 1005x580x268 | V / H | 3V+Booster RF | Yes | G4, F7 Opt. | **2.658 €** |
| RDCD25SKC | 30~180 | 27+27 | A | 39 | >90 | 30 | 1005x595x282 | V / H | 3V+Booster RF | Yes | G4, F7 Opt. | **2.821 €** |
| RDCD25SKH | 30~250 | 50+50 | A | 50 | >90 | 14 | 1005x580x268 | V / H | 3V+Booster RF | Yes | G4, F7 Opt. | **2.361 €** |
| RDCD25SKHC | 30~250 | 50+50 | A | 44 | >90 | 30 | 1005x595x282 | V / H | 3V+Booster RF | Yes | G4, F7 Opt. | **2.643 €** |
| RDCD30SH | 60~227 | 43+43 | A | 57 | >90 | 37 | 598x403x660 | V | 3V+Booster RF | Yes | G4, F7 Opt. | **3.268 €** |
| RDCD40SK | 40~320 | 83+83 | A | 48 | >90 | 48 | 1431x578x291 | V / H | 3V+Booster RF | Yes | G4, F7 Opt. | **2.824 €** |
| RDCD40SKC | 40~320 | 83+83 | A | 44 | >90 | 42 | 1431x596x298 | V / H | 3V+Booster RF | Yes | G4, F7 Opt. | **3.224 €** |
| RDCD50SH | 70~370 | 83+83 | A | 57 | >90 | 41 | 610x630x797 | V | 3V+Booster RF | Yes | G4, F7 Opt. | **3.516 €** |
| RDCD300HC | 150,0 | 750 | A | 49 | >80 | 54 | 832x803x250 | H | | Yes | G4, F7 Opt. | **6.962 €** |
| RDCD300HCH | 150,0 | 750 | A | 49 | >80 | 54 | 832x803x250 | H | | Yes | G4, F7 Opt. | **8.211 €** |
| RDCD500HCH | 250,0 | 1260 | A | 51 | >80 | 75 | 853x553x360 | V / H | | Yes | G4, F7 Opt. | **9.370 €** |
| RDCD50SK | 450,0 | 169+169 | A | 54 | >90 | 20 | 1431x578x291 | V / H | 3V+Booster RF | Yes | G4, F7 Opt. | **3.373 €** |
| RDCD500SKC | 450,0 | 169+169 | A | 50 | >90 | 42 | 1431x596x298 | V / H | 3V+Booster RF | Yes | G4, F7 Opt. | **3.523 €** |

C = Metal chassis

*m3/h under 100Pa

| | | |
|---|---|---|
| Modbus RF Control | MODBUSRF | **311 €** |
| CO2 Control | CORF | **538 €** |
| Humidity Control | RHRF | **256 €** |
| WIFI Control | APPRF | **377 €** |
| IR Control (incluido) | 4BRF | **120 €** |
| PRFControl | DSPRF | **283 €** |
| CO2 Wifi Master sensor | COWM | **338 €** |
| CO2 Wifi slave sensor | COWS | **360 €** |



DSPRF FUNCTIONS
By-pass speed control
Clogged filters
ON/OFF speed control
Single-point alarm
It needs power supply

AQ-Safe APP




INSTALACION VERTICAL A PARED - VERTICAL WALL INSTALLATION

Tipo - Type A (Standard)




Tipo - Type B

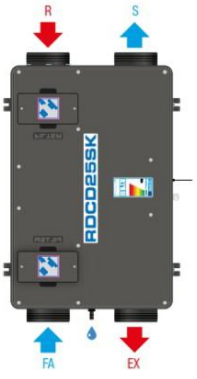


**Leyenda - Legend**

EX = expulsión - exhaust air
R = retorno - return
FA = aire exterior - fresh air
S = impulsión - supply

INSTALACION TECHO HORIZONTAL HORIZZONTAL CEILING INSTALLATION

Tipo - Type A (Standard)




Tipo - Type A1 (Standard)




Tipo - Type B





Tipo - Type B1






coolwell

# Residential Heat Recovery Units RCDC

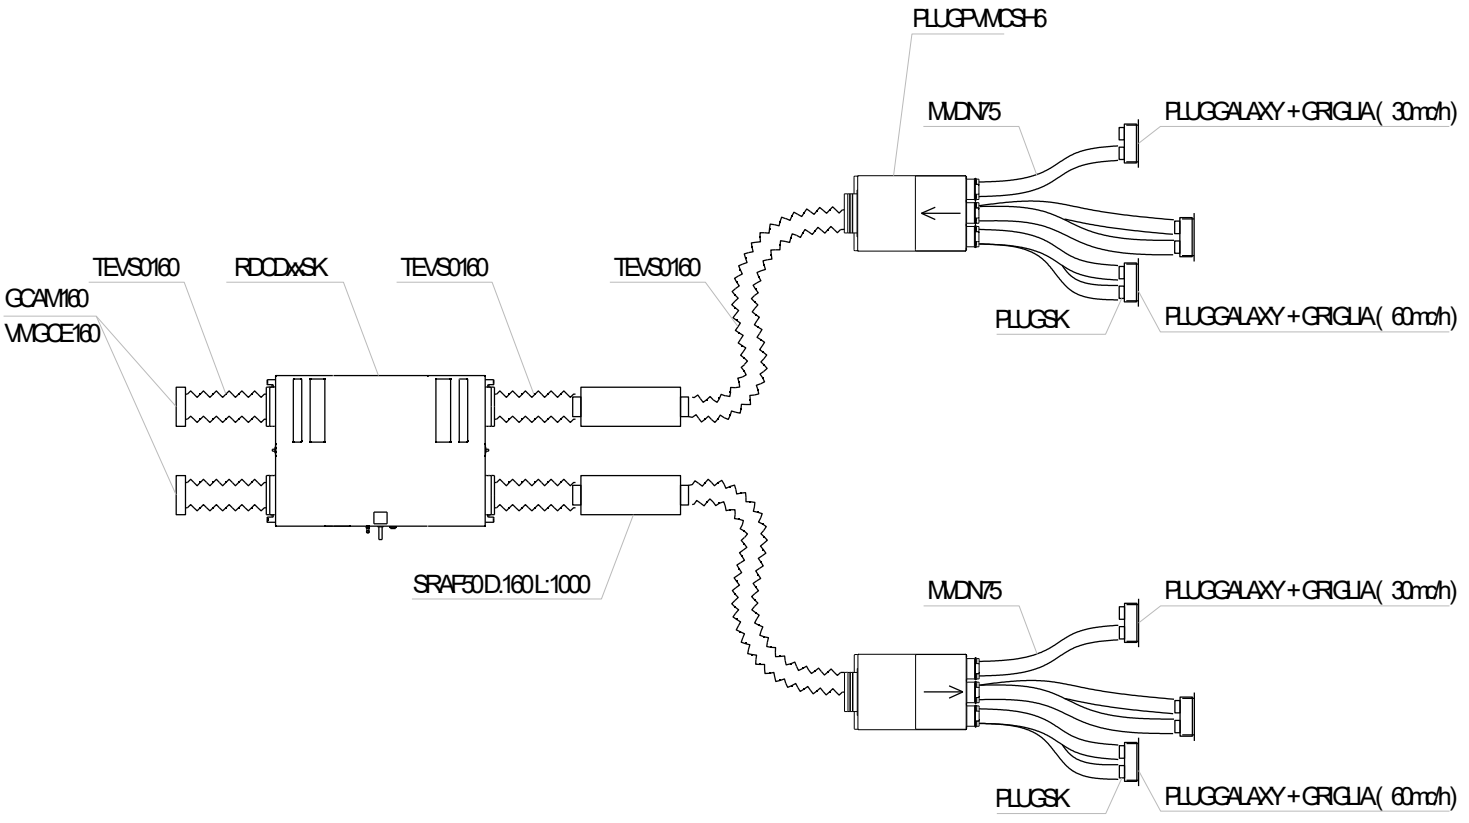



## GALAXY



Plenum.

GALAXY: **48,46€**

## RejillasVMC



Grilles.

TERRA P: **31,74€**
SATURNO P: **31,74€**

## LAF10



Grilles.

LAF10200X100: **29,53€**
LAF10250X100: **36,71€**
LAF10350X100: **60,58€**

## PVMSH



Plenum.

PLUGPVMSH1200X100: **68,59€**
PLUGPVMSH1250X100: **78,94€**
PLUGPVMSH1350X100: **89,42€**

## PVMPB



Plenum.

PVMPB 200X100: **58,1€**
PVMPB 250X100: **70,1€**
PVMPB 300X100: **95,36€**

## RPCM80



Air distribution duct

RPCM80: **33,26€**

## PVMCSH4



Plenum.

PVMCSH4: **210,86€**

## PVMCSH6



Plenum.

PVMCSH6: **248,16€**

## PVMCSH10



Plenum.

PVMCSH10: **337,37€**

## PVMCMR



Supply and return air plenum

PLUGPVMCMR: **445,61€**

## SRA-F50



Air silencer.

SRA-F50 D160 L500: **119,23€**
SRA-F50 D160 L1000: **197,2€**

## TEVS0160D



Circular grille.

TEVS016D: **150,42€**

## VM-TP-160



Plenum VM.

VM-TP160: **152,08€**

## FILTROS



| | G4, 2ud | | F7, 1ud | |
|---|---|---|---|---|
| RDCD20 | FTRLET23 | 68,55 € | FTRLET48 | 72,92 € |
| RDCD25 | FTRLET23 | 68,55 € | FTRLET48 | 72,92 € |
| RDCD25SK | KFTR060A | 72,04 € | FTRLET483 | 76,70 € |
| RDCD30SH | FTRSV231 | 245,61 € | FTRSV481 | 208,73 € |
| RDCD40SK | KFTR062A | 79,35 € | FTRLET484 | 124,78 € |
| RDCD50SK | KFTR062A | 79,35 € | FTRLET484 | 124,78 € |
| RDCD50SH | FTRSV23 | 124,34 € | FTRSV48 | 218,00 € |

## EAVCM125



Valve 125mm

EAVCM125: **10,07€**

## MVD



Air distribution ductwork

MVD 75: **74,52€**
MVD 90: **102,12€**

## GCAM



Circular grille160

GCAM160R9003: **26,77€**

## ECOFILTER




420 m3h

Electrostatic air filter.

ECOFILTRO F8: **2.417,5€**

# Industrial Heat Recovery Units RAREC



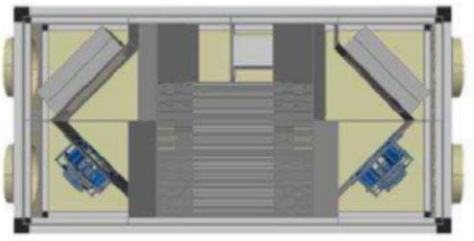

## HIGH-EFFICIENCY HEAT RECOVERY UNIT

| Model | Qi (m3/h) | Qe (m3/h) | Pd (Pa) | Ef EN308 (%) | *Dimensions (mm) L | P | A | Diamm. | Weight (kg) | Power Supply V / Phase / Hz | Power max. (W) | Price Horizontal | Price Vertical |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| RAREC-060 | 350 | 350 | 468 / 523 | 80,6 | 1.300 | 700 | 335 | Ø 250 | 78 | 220/1Phase/50 | 332 | 3.594 € | 4.042 € |
| | 475 | 475 | 197 / 280 | 77,9 | | | | | | | | | |
| | 558 | 558 | 0 / 108 | 76,5 | | | | | | | | | |
| RAREC-100 | 550 | 550 | 668 / 681 | 80,5 | 1.550 | 1.050 | 335 | Ø 250 | 114 | 220/1Phase/50 | 672 | 4.959 € | 5.432 € |
| | 800 | 800 | 371 / 421 | 77,4 | | | | | | | | | |
| | 1.028 | 1.016 | 0 / 105 | 74,9 | | | | | | | | | |
| RAREC-140 | 750 | 750 | 529 / 584 | 80,2 | 1.900 | 1.050 | 455 | Ø 355 | 163 | 220/1Phase/50 | 672 | 5.570 € | 6.104 € |
| | 1.000 | 1.000 | 287 / 362 | 78,2 | | | | | | | | | |
| | 1.289 | 1.298 | 0 / 85 | 76,6 | | | | | | | | | |
| RAREC-190 | 1.000 | 1.000 | 556 / 578 | 78,2 | 1.900 | 1.050 | 455 | Ø 355 | 168 | 220/1Phase/50 | 986 | 6.676 € | 7.392 € |
| | 1.500 | 1.500 | 301 / 351 | 75,4 | | | | | | | | | |
| | 1.926 | 1.908 | 0 / 93 | 73,8 | | | | | | | | | |
| RAREC-230 | 1.500 | 1.500 | 610 / 688 | 76,8 | 1.900 | 1.250 | 455 | Ø 355 | 184 | 220/1Phase/50 | 1.538 | 7.500 € | 8.293 € |
| | 1.850 | 1.850 | 367 / 460 | 75,5 | | | | | | | | | |
| | 2.256 | 2.271 | 0 / 96 | 74,6 | | | | | | | | | |
| RAREC-330 | 2.000 | 2.000 | 807 / 829 | 76,7 | 2.150 | 1.300 | 595 | Ø 450 | 225 | 220/1Phase/50 | 2.658 | 8.824 € | 9.741 € |
| | 2.750 | 2.750 | 373 / 437 | 75,1 | | | | | | | | | |
| | 3.210 | 3.210 | 0 / 100 | 74,7 | | | | | | | | | |
| RAREC-400 | 2.750 | 2.750 | 844 / 884 | 75,1 | 2.150 | 1.300 | 595 | Ø 450 | 242 | 400/3Phase+N/50 | 4.902 | 9.009 € | 9.938 € |
| | 3.500 | 3.500 | 396 / 465 | 73,9 | | | | | | | | | |
| | 4.028 | 4.028 | 0 / 100 | 74 | | | | | | | | | |
| RAREC-500 | 3.000 | 3.000 | 1.186 / 1232 | 76,6 | 2.150 | 1.300 | 860 | 600x800 | 340 | 380/3Phase+N/50 | 4.712 | 10.437 € | 11.612 € |
| | 4.500 | 4.500 | 419 / 542 | 74,2 | | | | | | | | | |
| | 5.087 | 5.167 | 0 / 103 | 73,3 | | | | | | | | | |
| RAREC-650 | 4.250 | 4.250 | 1.186 / 1219 | 75,7 | 2.150 | 1.300 | 1.150 | 600x1.090 | 397 | 380/3Phase+N/50 | 7.800 | 12.252 € | 13.528 € |
| | 6.000 | 6.000 | 341 / 419 | 74,0 | | | | | | | | | |
| | 6.533 | 6.531 | 0 / 100 | 74 | | | | | | | | | |
| RAREC-800 | 5.500 | 5.500 | 844 / 884 | 75,1 | 2.150 | 1.300 | 1.150 | 600x1.090 | 411 | 380/3Phase+N/50 | 9.804 | 16.260 € | 17.594 € |
| | 7.000 | 7.000 | 396 / 465 | 73,9 | | | | | | | | | |
| | 8.056 | 8.056 | 0 / 100 | 72.5 | | | | | | | | | |

*Dimensions do not include the electrical control panel

OPTIONALS:

- Pre-painted external casing
- Outdoor installation kit
- Additional fresh air filter
- Electric heaters from 1,500 W (single stage) up to 22,500 W (three stages)
- Chilled water coils
- Hot water coils



| | | |
|---|---|---|
| $CO_2$ sensor | | 436 € |
| Constant pressure control sensor | | 442 € |
| Radon sensor | | 1.656 € |
| $CO_2$ Wi-Fi master sensor | COWM | 338 € |
| $CO_2$ Wi-Fi slave sensor | COWS | 360 € |

LEGEND
Qi: Standard supply airflow, with M6 + F8 filters
Pd: Available pressure (supply / exhaust)
Ef EN308: Efficiency according to EN 308
(outdoor air 5°C, 72% RH – indoor air 25°C, 28% RH)
Qe: Standard exhaust airflow, with M6 filters

More information at www.coolwell.com



coolwell

# Curtains: WING, WING PRO



Series WING



VERTICAL or
HORIZONTAL
INSTALLATION

VIDEOWING

## WINGS curtains (EC and AC engines) y WING PRO

| Model | Type | Large mm | Max height m | Capacity kW | Power Input kW | Airflow max. m3/h | Sound Pressure dB(A) | Power Supply V/Fase/Hz | Price |
|---|---|---|---|---|---|---|---|---|---|
| WING W100 (EC) | Water coil | 1.000 | 4 | 4~17 | 0,2 | 1.850 | 56/59/61 | 220/1F/50 | **1.041 €** |
| WING W150 (EC) | Water coil | 1.500 | 3,7 | 10~32 | 0,3 | 3.100 | 57/62/63 | 220/1F/50 | **1.304 €** |
| WING W200 (EC) | Water coil | 2.000 | 4 | 17~47 | 0,5 | 4.400 | 60/65/66 | 220/1F/50 | **1.608 €** |
| WING W100 (AC) | Water coil | 1.000 | 4 | 4~17 | 0,2 | 1.850 | 56/59/61 | 220/1F/50 | **951 €** |
| WING W150 (AC) | Water coil | 1.500 | 3,7 | 10~32 | 0,4 | 3.100 | 57/62/63 | 220/1F/50 | **1.144 €** |
| WING W200 (AC) | Water coil | 2.000 | 4 | 17~47 | 0,6 | 4.400 | 60/65/66 | 220/1F/50 | **1.419 €** |
| WING E100 (EC) | Electric heater | 1.000 | 4 | 2~6 or 4~6 | 0,2 + 2/4 | 1.850 | 53/55/62 | 220/1F/50 | **1.035 €** |
| WING E150 (EC) | Electric heater | 1.500 | 3,7 | 4~12 or 8~12 | 0,3 + 4/8 | 3.150 | 55/60/62 | 380/3F/50 | **1.298 €** |
| WING E200 (EC) | Electric heater | 2.000 | 4 | 6~15 or 9~15 | 0,45 + 6/9 | 4.500 | 59/63/64 | 380/3F/50 | **1.602 €** |
| WING E100 (AC) | Electric heater | 1.000 | 4 | 2~6 or 4~6 | 0,23 + 2/4 | 1.850 | 53/55/62 | 220/1F/50 | **947 €** |
| WING E150 (AC) | Electric heater | 1.500 | 3,7 | 4~12 or 8~12 | 0,38 + 4/8 | 3.150 | 55/60/62 | 380/3F/50 | **1.138 €** |
| WING E200 (AC) | Electric heater | 2.000 | 4 | 6~15 or 9~15 | 0,58 + 6/9 | 4.500 | 59/63/64 | 380/3F/50 | **1.419 €** |
| WING C100 (EC) | - ventilation only - | 1.000 | 4 | | 0,2 | 1.950 | 57/63/66 | 220/1F/50 | **881 €** |
| WING C150 (EC) | - ventilation only - | 1.500 | 4 | | 0,3 | 3.200 | 58/66/67 | 220/1F/50 | **1.153 €** |
| WING C200 (EC) | - ventilation only - | 2.000 | 4 | | 0,5 | 4.600 | 61/65/67 | 220/1F/50 | **1.406 €** |
| WING C100 (AC) | - ventilation only - | 1.000 | 4 | | 0,2 | 1.950 | 57/63/66 | 220/1F/50 | **813 €** |
| WING C150 (AC) | - ventilation only - | 1.500 | 4 | | 0,4 | 3.200 | 58/66/67 | 220/1F/50 | **1.010 €** |
| WING C200 (AC) | - ventilation only - | 2.000 | 4 | | 0,6 | 4.600 | 61/65/67 | 220/1F/50 | **1.293 €** |
| WING PRO C150 (EC) | - ventilation only - | 1.500 | 8,0 | | 2x0,2 | 8.500 | | 220/1F/50 | **1.841 €** |
| WING PRO C200 (EC) | - ventilation only - | 2.000 | 8,0 | | 3x0,2 | 12.800 | | 220/1F/50 | **2.406 €** |
| WING PRO W150 R1 (EC) | Water coil | 1.500 | 7,5 | 9~32 | 2x0,2 | 7.900 | | 220/1F/50 | **2.134 €** |
| WING PRO W200 R1 (EC) | Water coil | 2.000 | 7,5 | 15~48 | 3x0,2 | 11.900 | | 220/1F/50 | **2.750 €** |
| WING PRO W150 R2 (EC) | Water coil | 1.500 | 7,0 | 17~58 | 2x0,2 | 7.300 | | 220/1F/50 | **2.233 €** |
| WING PRO W200 R2 (EC) | Water coil | 2.000 | 7,0 | 28~88 | 3x0,2 | 10.700 | | 220/1F/50 | **2.899 €** |

## ACCESORIES

| Code | Type | Price |
|---|---|---|
| **1-4-2801-0180** | Air curtain brackets 100 | **32,38 €** |
| **1-4-2801-0181** | Air curtain brackets 150–200 | **49,52 €** |
| **1-4-0101-0454** | Door sensor | **32,38 €** |
| **1-4-2801-0155** | HMI Wing EC controller | **151,14 €** |
| **1-4-0101-0438** | Wing EC WALL controller (IP30) | **26,67 €** |
| **1-4-0101-0453** | VR EC potentiometer (0–10 V) | **50,38 €** |
| **1-4-0101-0473** | VR EC potentiometer (0–10 V) with temperature sensor | **61,33 €** |
| **1-2-1205-0007** | NTC temperature sensor IP66 | **32,86 €** |
| **1-4-0101-0434** | ARW 3.0/2 speed controller | **140,19 €** |
| **1-4-0101-0038** | VR thermostat | **24,76 €** |
| **1-4-0101-0167** | ARW 0.6 speed controller | **76,67 €** |
| **1-2-1204-2019** | Valve with actuator | **111,71 €** |

Series WING PRO





VERTICAL or
HORIZONTAL
INSTALLATION

# Fire Protection Duct


## BTT 25



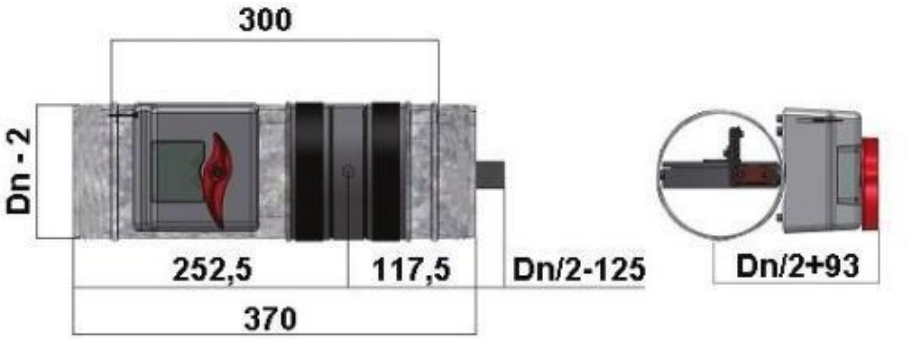


## BTT 30 EURO



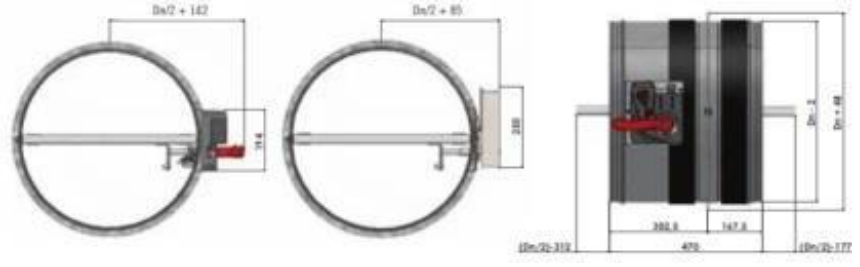


FEATURES:CE-marked fire dampers certified according to UNE EN 15650, classified in accordance with UNE EN 13501-3 and tested according to UNE EN 1366-2.Designed for installation in ventilation ducts, they ensure rapid interruption of airflow in the event of fire.Actuated by electromagnet or thermal fuse with mechanical reset.

CONSTRUCTION:Galvanized steel casing with intermediate thermal break.Fibrosilicate blade mounted on steel rotation pins housed in brass bushings.Equipped with duct connection spigots and a thermal release device factory-set at 72°C.

## MDF 25 L



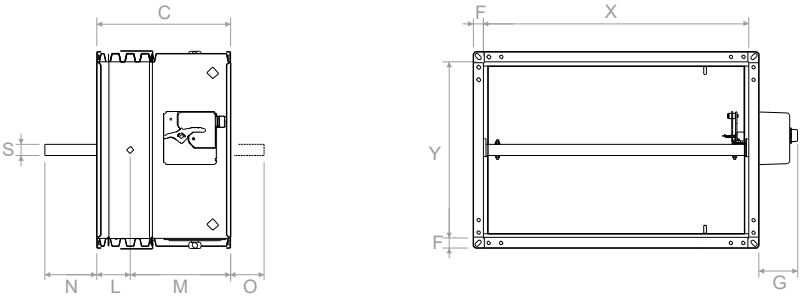



FEATURES:CE-marked fire dampers certified according to UNE EN 15650, classified in accordance with UNE EN 13501-3 and tested according to UNE EN 1366-2.Suitable for installation in ventilation ducts, they ensure rapid interruption of airflow in the event of fire.Actuated by electromagnet or thermal fuse with mechanical reset.

CONSTRUCTION:Galvanized steel casing with intermediate thermal break.Fibrosilicate blade mounted on steel rotation pins housed in brass bushings.Equipped with an external flange for duct connection and a thermal release device factory-set at 72°C.

OPERATING CONDITIONS:Clean air, maximum air velocity 10 m/s.

## MDF 30 EURO



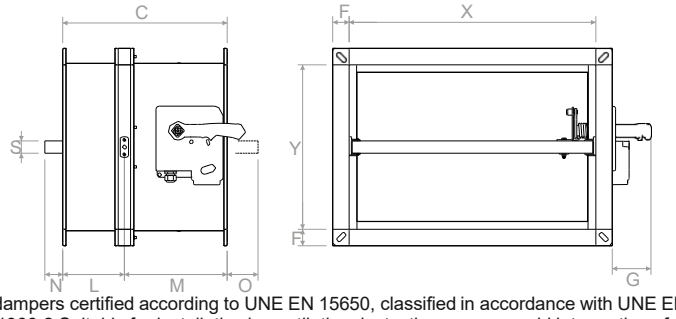


FEATURES:CE-marked fire dampers certified according to UNE EN 15650, classified in accordance with UNE EN 13501-3 and tested according to UNE EN 1366-2.Suitable for installation in ventilation ducts, they ensure rapid interruption of airflow in the event of fire.They can be actuated by servo motor, electromagnet, or thermal fuse with mechanical reset.

CONSTRUCTION:Heavy-gauge double galvanized steel casing with an intermediate fibrosilicate thermal break.Fibrosilicate blade mounted on steel rotation pins housed in an external flange for duct connection, and equipped with a thermal release device factory-set at 72°C.

OPERATING CONDITIONS:Clean air, maximum air velocity 10 m/s.

**Price on request**

# GENERAL SALES CONDITIONS

## I. DEFINITIONS

1."Seller": Doco Technologies (hereinafter DOCO), the commercial company that markets the products included in this catalogue.
2."Customer": Purchaser of the goods and products included in this Price List.
3."Parties": The Seller and the Customer, jointly.
4."Product": The object of the sale and all ancillary services contracted.

## II. APPLICATION

The Customer accepts these General Terms and Conditions of Sale in its commercial relationship with DOCO. These conditions shall apply in full unless expressly waived in writing by DOCO.

## III. PRICES

Unless otherwise agreed between the Parties, prices shall be understood as referring to goods located at our warehouses. If the Parties expressly agree that transport is to be carried out at the Seller's expense, unloading shall nevertheless be at the Customer's cost and risk.Prices in the Price List may be modified upon simple notice to the Customer. If the Customer does not accept the new price, it must notify DOCO in writing within 8 days from the date of receipt of such notice. In the absence of a response, the new conditions shall be deemed accepted.

## IV. DELIVERY TIMES

Delivery times stated in our order confirmation are indicative only. Therefore, DOCO shall not assume any liability for damages or losses arising from delays in the delivery of the goods.

## V. PACKAGING

Products are supplied packaged in the usual manner.Where possible, the Customer's instructions regarding alternative types or forms of packaging shall be complied with and invoiced at cost price. This item shall be shown separately on the invoice.

## VI. PAYMENT TERMS

Prices shall be understood as payable in cash, unless otherwise agreed between the Parties.The maximum payment terms accepted by DOCO shall be those established by Law 15/2010 of 5 July, amending Law 3/2004 of 29 December, which establishes measures to combat late payment in commercial transactions.

## VII. OWNERSHIP OF THE PRODUCT AND RETENTION OF TITLE

The Product shall remain the property of DOCO until full payment has been made.

1. The Seller retains title to the Product until full settlement of all outstanding credits, regardless of the business transaction or order giving rise to the debt. For the purposes of retention of title, payment shall be deemed completed once it has become irrevocably effective.Retention of title shall also constitute a guarantee for the Seller's claims against the Customer. In particular, the Seller retains ownership until the Customer has released the Seller from any potential liabilities arising from negotiable instruments issued in favor of the Customer to third parties.

2. Without prejudice to the right of retention of title, the Customer shall be entitled to use the Product provided that it complies with the obligations set out in this section and is up to date with payments. Any delay in payment or breach of these obligations shall oblige the Customer to return the Product if required by the Seller.

Upon prior notice to the Customer, the Seller shall be entitled to freely dispose of the Product subject to retention of title at the best possible price, which shall be determined after deducting any amounts paid on account by the Customer.

3. The Customer is authorised to sell the Product to third parties in the course of its professional or business activity. The Customer may not pledge the Product or use it as collateral. The Customer shall be obliged to ensure the protection and preservation of the Seller's retention of title rights when selling the Product to a third party.

## VIII. RECEPTION

1.The Customer shall have the right to examine the Product at the place where it is made available to them within 2 working days, counted from the date of receipt stated on the delivery note issued by the transport company.

2.If, for reasons attributable to the Customer, the Product is not examined and/or not received within the aforementioned 2-day period, the Product shall be deemed to have been received in full conformity by the Customer.

## IX. RETURNS

No exchanges or returns shall be accepted once the goods have been supplied, unless expressly authorised by DOCO.
In such cases, transport costs shall be borne by the Customer, and the units and their packaging must be in perfect condition. DOCO reserves the right to deduct from the amount to be refunded any costs related to the receipt, inspection and/or repair of the returned goods.

## X. WARRANTY

DOCO guarantees, for a period of two years, the replacement of defective material, provided that the product has been used under normal and appropriate operating conditions, and that its installation has been carried out in accordance with current regulations, by duly qualified personnel, and in compliance with the instructions set out in the installation manuals.DOCO declines all liability for any damage or loss caused to persons or property resulting from the malfunction of the equipment.
The following are excluded from the Seller's warranty; damages caused by:

- Improper use of the product or operation beyond its intended limits.
- Handling, maintenance, or repair of the product by a technician not authorised by the manufacturer.
- Use of non-authorised spare parts or modification of the product without the manufacturer's approval.
- Failure to comply with the manufacturer's instructions regarding the use, inspection, and maintenance of the product, where such failure has caused the defect.

## XI. TAXES

All taxes applicable to the sale of DOCO products included in this Price List, in accordance with current legislation, shall be borne by the Customer.

## XII. RAEE FEE

In compliance with Spanish Royal Decree 208/2005 of 28 February, on Electrical and Electronic Equipment and the Management of its Waste, the corresponding RAEE fee shall be applied to each outdoor unit with a thermal capacity of up to 12 kW. These models are identified with the RAEE mark in the corresponding price tables. The amount of the applicable RAEE fee may be modified without prior notice.

## XIII. JURISDICTION

The validity, interpretation and enforcement of these General Terms and Conditions of Sale shall be governed by and construed in accordance with Spanish law.In the event of any dispute or controversy, the Parties expressly waive any other jurisdiction that may correspond to them and submit to the Jurisdiction and Courts of Madrid (Capital), Spain.

## XIV. PRICE VALIDITY

The prices indicated in this Price List are valid until 31 December 2026.

coolwell

# WARRANTY CONDITIONS

## GENERAL WARRANTY TERMS

The Spanish Royal Legislative Decree 1/2007 of 16 November, approving the consolidated text of the General Law for the Defense of Consumers and Users, establishes a two-year Legal Warranty period from the date of delivery of new products marketed by Doco Technologies to the consumer by the Seller.
On certain occasions, and on a voluntary basis,Doco Technologies may grant a Commercial Warranty in addition to the Legal Warranty. The duration of such Commercial Warranty, as well as the rights granted to the consumer thereunder, shall be those specifiedby Doco Technologies in each case.
In order to exercise either the Legal Warranty or the Commercial Warranty, it is essential to provide documentary proof of the product's delivery and/or purchase date, such as an invoice, purchase receipt, delivery note, or a duly stamped and dated warranty card Documents that have been altered or falsified shall not be accepted.

## WARRANTY CONDITIONS

The consumer must inform Doco Technologies of any lack of conformity within a period of two months from the date on which they became aware of it. Failure to comply with this deadline shall result in the loss of the corresponding right to remedy.
The Legal Warranty covers the repair of the product as a result of lack of conformity and, in such cases, such repairs shall be free of charge for the consumer, including labor and materials. Replacement of the product, instead of repair, shall be determined by the technical department only where repair is not possible or would be excessively costly.
In all cases, warranty repairs must be carried out by a Technical Assistance Service authorized by Doco Technologies.
Repair or replacement shall not suspend the calculation of the Legal Warranty period and shall not, under any circumstances, give rise to a new two-year warranty period from the delivery of the repaired or replaced product.
Split-type air conditioning units require a refrigeration installation and are therefore classified as unfinished products. Consequently, the final condition and proper operation of air conditioning equipment depend on the refrigeration installation, which must in all cases be carried out by an authorized installer, in compliance with the applicable legal requirements and with sufficient technical expertise.
The installer is responsible for the correct installation of the equipment, as indicated in the installation manual supplied with each unit, as well as for any additional refrigerant charging required due to excess piping length. Repairs resulting from incorrect installation shall be borne by the installer and, if intervention by an Authorized Technical Service is required, such intervention shall be charged to the user.
The product must be installed in accessible locations that allow for repair and maintenance. It is the user's responsibility to ensure easy access to the product. Any costs incurred to gain access to the equipment shall be borne by the customer, and the manufacturer reserves the right to refuse to carry out repairs where the conditions set out in this section are not met.
The consumer is responsible for using the product in accordance with the rules and instructions set out in the user and maintenance manual supplied with each unit.

## LIMITATIONS OF THE WARRANTY

The warranty does not provide for, nor does it include, periodic maintenance inspections, product installation, commissioning, or operating demonstrations for the user.
The warranty shall be void if the product or any of its identifying elements (serial number, model, etc.) have been, in whole or in part, opened, assembled, disassembled, handled and/or repaired by persons other than Technical Assistance Services authorised by Doco Technologies.
The warranty shall not apply if the model and serial number of the equipment do not match the purchase document or the details stated on the warranty certificate.
The warranty does not cover any lack of conformity resulting from incorrect installation, failure to comply with the technical and safety regulations in force at the place of installation, or failure to observe the limitations specified in the installation manual supplied with each unit.
The warranty shall not apply if the malfunction is caused by fire, flooding, meteorological agents, impact, crushing, or the application of incorrect voltage. Damage caused by failure to follow the use and maintenance instructions provided with each unit is excluded from the warranty.
Failures resulting from normal use of the equipment, such as blocked drains, filter cleaning, wear of parts due to normal use, or lack of maintenance, are excluded.
Moving parts such as louvers, grilles, covers, or accessories such as remote controls, Wi-Fi modules, etc., are not covered.
None of the warranties set out herein covers the replacement of parts due to wear or breakage of mechanisms, seals, housings and/or plastics, nor cosmetic deterioration resulting from normal use of the product. Likewise, the warranties do not cover any damage occurring during transport of the product (including, but not limited to, cosmetic damage, impacts, scratches, scuffs, stains, dents, etc.), in which case the provisions set out in the General Terms and Conditions of Sale of Doco Technologies shall apply.

## PERSONAL DATA PROTECTION

In accordance with the spanish Organic Law 15/1999, you are hereby informed that the personal data requested, all of which are mandatory for the provision of the Warranty service, will be incorporated into one or more files duly registered in the GDPR,for which Doco Technologies is the data controller, for the purpose of providing the service and keeping you informed about similar products or services.You may exercise your rights of access, rectification, erasure and objection by submitting a signed written request, together with a photocopy of your ID card or NIE, addressed to the Legal Department ofDoco Technologies.

www.coolwell.com

DOCO TECHNOLOGIES

Calle Lucio Emilio Cándido, 6,
DC 6, Módulo 2,
28803, Alcalá de Henares,
Madrid, Spain,
ES-B86404167
www.coolwell.com
info@coolwell.com
Tlf.:+34 91 710 04 60

Dpto. Post Venta:
Tlf.: +34 91 709 79 00
sat@coolwell.es